
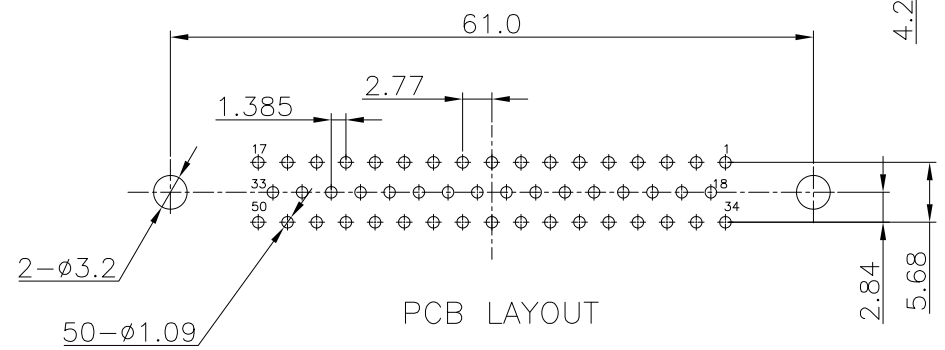
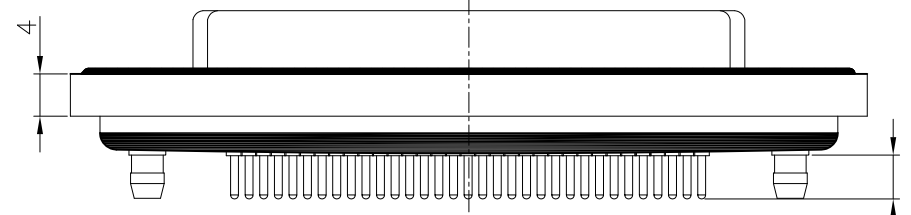



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

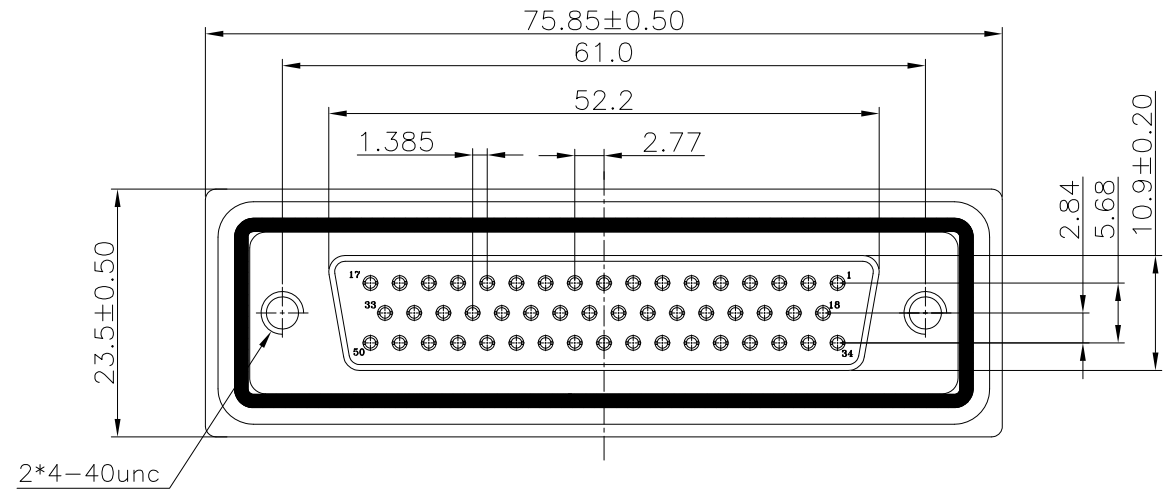

- NOTE
- MATERIAL AND FINISH:
    - 1-1.SHELL : SPCC-SD T=0.30mm,NICKEL 50u"MIN FINISHED
    - 1-2.HOUSING : PBT UL94V-0 , COLOR:BLACK
    - 1-3.CONTACT: COPPER ALLOY,ALLOVER GOLD FLASH PLATED
    - 1-4.RIVERT:COPPER ALLOY, TIN 80u"MIN FINISHED
    - 1-5.O-RING : SILICONE RUBBER
    - 1-6.EPOXY SEALANT: EPOXY
  - ELECTRICAL:
    - 2-1.CURRENT RATING: 3AMPS MIN.
    - 2-2.CONTGACT RESISTANCE: 20 mΩ MAX
    - 2-3.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC R.M.S
    - 2-4.INSULATOR RESISTANCE: 5GΩ MIN.
  - ENVIRONMENTAL
    - TEMPERATURE RANGE:-55°C TO + 105°C.
  - WATERPROOFING GRADE: IP67

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBFO-5011A1210	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28			
			0.0±0.35	X'REF±6'	DESIGNER	Han_Gao	22.10.28	TITLE: DP 50F防水插板			
			UNIT:mm	0.00±0.25	X'±3'	DRAWN	LanXuan_Hou		22.10.28		
			SIZE: A4	0.000±0.10	X'X' ±2'				REV: A0	SHEET: 1/1	