




The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

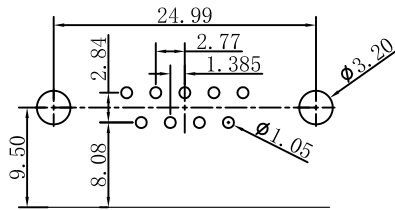

CHARACTERISTICS:


- 1、RATED VOLTAGE: 250V AC CD
- 2、RATED CURRENT: 3.0AMP
- 3、CONTACT RESISTANCE: 30mΩ Max.
- 4、INSULATION RESISTANCE: 1000 MΩ MIN.500V DC
- 5、Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、Operating temperature: -55°C~105°C
- 7、INSERTION/EXTRACTION FORCE PER CONTACT: 3.0Kg Max
0.3Kg Min.

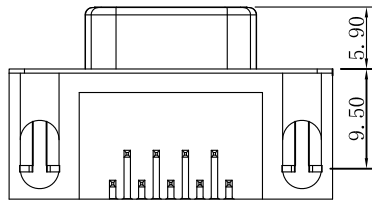

PCB layout

ORDER INFORMATION

P/N:WLDBF9-091XXX034

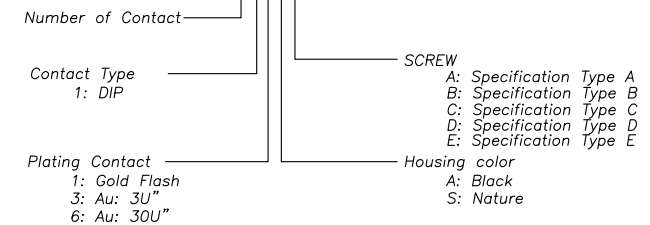

Specification Type (1:2)				
A	B	C	D	E
	4.80	5.80	4.80	5.80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.03.11	WLDBF9-091XXX034	ENDE05	
			UNIT: mm	0.00±0.25	X° ±3°	DESIGNER	Ding_Bo	21.03.11	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	Ou_Jian	21.03.11	DR 9F 8.08 90° DIP		