
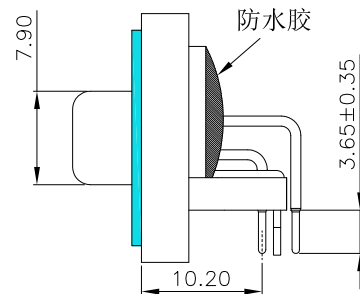
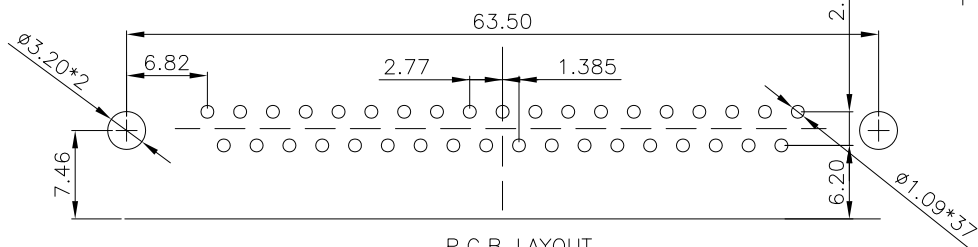
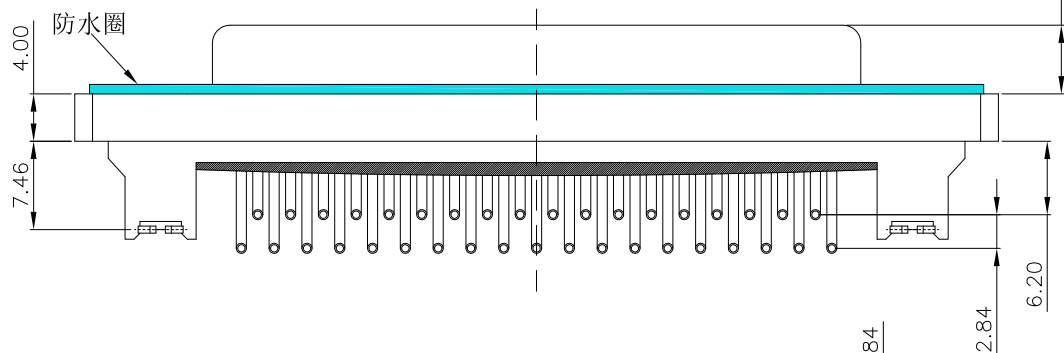


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements


RoHS

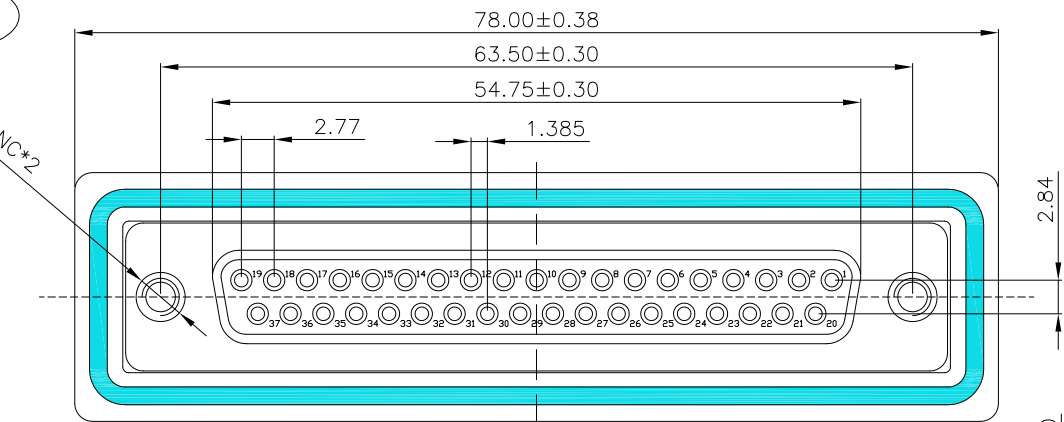

NOTE
 1.ELECTRICAL:
 1-1 INSULATOR RESISTANCE: 3000MEGOHMS MIN AT 500V DC.
 1-2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S
 1-3 RATED VOLTAGE: 500V AC Min
 1-4 CURRENT RATING: 5A.
 1-5 CONTGACT RESISTANCE: 30 MILLIOHMS MAX.
 2.ENVIRONMENTAL
 TEMPERATURE RANGE:-55°C TO + 105°C.
 3.SALT SPRAY: 48H;
 4.IP RATING: IP67

P/N: WLDBF9-3711AA236
 Q'TY of Contact
 Contact Type
 1: DIP
 Plating Contact
 1: Gold Flash
 3: Au: 3U"
 Specification Type:
 A-Type A
 Housing color
 A: Black
 K: White

Item	Name	Material	Surface Plating
1	Housing	PBT+GF	BLACK
2	Waterproof Frame	Silica gel	BLUE
3	Waterproof ring	PA66	BLACK
4	Contact	Copper alloy	Gold allover
5	Shell	Spcc-sd	Nickel Plating
6	PCB-Lock	Copper alloy	Tin Plating
7	Rivet	Copper alloy	Nickel Plating

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO: WLDBF9-3711AA236	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.03.19	LINEAR	ANGLES	1:1	Wang_jr	22.03.19			
			0.0±0.35	X'REF±6°	APPROVED	XueZe_Ma	22.03.19	TITLE: DR 37Pin Female Lathe Terminal	REV: A0	SHEET: 1/1
			0.00±0.25	X'±3°	CHECK	LanXuan_Hou	22.03.19			
			UNIT:mm	X'X' ±2°	DRAWN					
			SIZE: A4	0.000±0.10						