

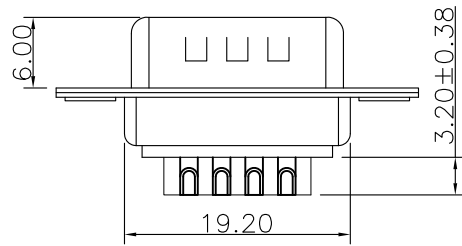


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

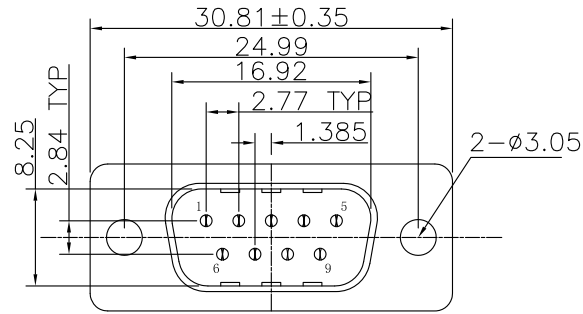

NOTE

1.MATERIAL:

- 1.1 INSULATOR: PBT+30% GLASS FIBER UL94V-0
COLOR:BLACK or WHITE
- 1.2 TERMINAL: COPPER ALLOY BRASS,
GOLD FLASH ON ALLOVER TERMINAL AREA
- 1.3 SHELL: FRONT SHELL:SPCC-SD T=0.35±0.02mm
PLATING:Cu50u"/Ni50u" ;
REAR SHELL:SPCC-SD T=0.35±0.02mm
PLATING:Cu50u"/Tin80u"
- 1.4 SCREW: STEEL, PLATING: Cu50u"/Ni40u"
- 1.5 SALT SPRAY: PLATING GOLD, 24H; OTHER PART: 12H .

2.ELECTRICAL:

- 2.1 INSULATOR RESISTANCE: 1000MEGOHMS MIN AT 500V DC.
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S
- 2.3 VOLTAGE TATING: 40V AC (RMS) CONTINUOUS MAX.
- 2.4 CURRENT RATING: 5A.
- 2.5 CONTGACT RESISTANCE: 30 MILLIOHMS MAX.


3.MECHANICAL

- 3.1 INSERTION/EXTRACTION FORCE PER CONTACT: 3.0Kgf Max
0.3Kgf Min.


4.ENVIRONMENTAL

- TEMPERATURE RANGE:-55°C TO + 105°C.

ORDER INFORMTION

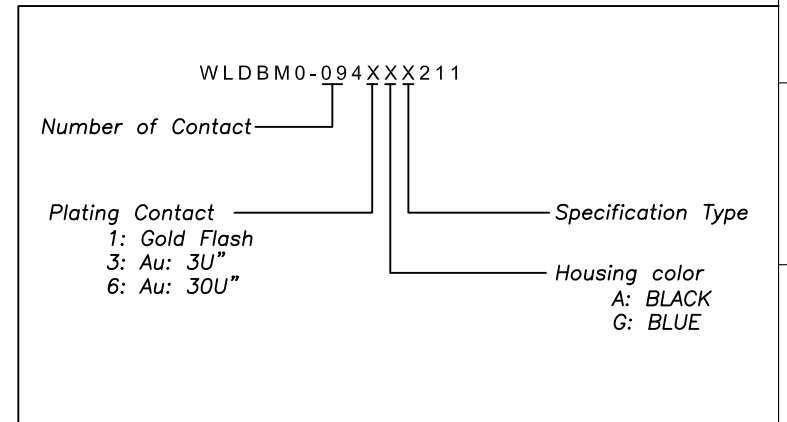

Specification Type

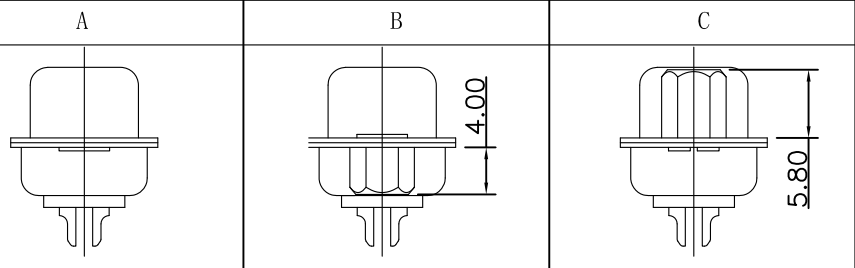

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBM0-094XXX211	DWG.NO: ENDE05	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17			
			0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: D-SUB 9P/M LATHE PIN			
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang		21.11.17		
			SIZE: A4	0.000±0.10	X°X' ±2°				REV: A0	SHEET: 1/1	