
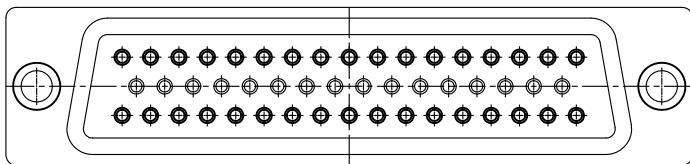
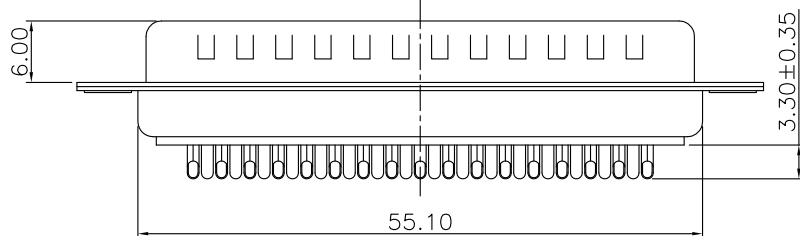



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

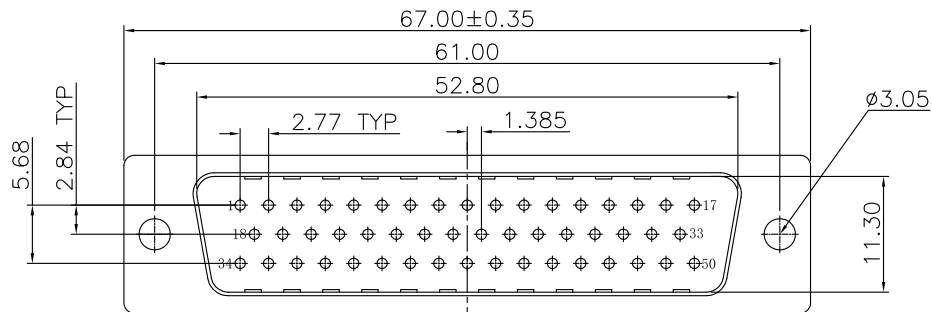

NOTE

1.MATERIAL:

- 1.1 INSULATOR: PBT+30% GLASS FIBER UL94V-0
COLOR:BLACK or WHITE
- 1.2 TERMINAL: COPPER ALLOY BRASS,
GOLD FLASH ON ALLOVER TERMINAL AREA
- 1.3 SHELL: FRONT SHELL:SPCC-SD T=0.35±0.02mm
PLATING:Cu50u"/Ni50u" ;
REAR SHELL:SPCC-SD T=0.35±0.02mm
PLATING:Cu50u"/Tin80u"

2.ELECTRICAL:

- 2.1 INSULATOR RESISTANCE: 1000MEGOHMS MIN AT 500V DC.
- 2.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S
- 2.3 VOLTAGE RATING:250V AC/DC
- 2.4 CURRENT RATING: 3A.
- 2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

3.MECHANICAL

- 3.1 INSERTION/EXTRACTION FORCE PER CONTACT: 14Kgf Max
1.6Kgf Min.

4.ENVIRONMENTAL

TEMPERATURE RANGE:-55°C TO + 105°C.


5.P/N:


WLDBMO-5041X X 223

COLOR: _____
A-BLACK
K-WHITE

TYPE:
A-TYPE A
B-TYPE B
C-TYPE C
D-TYPE D

Specification Type

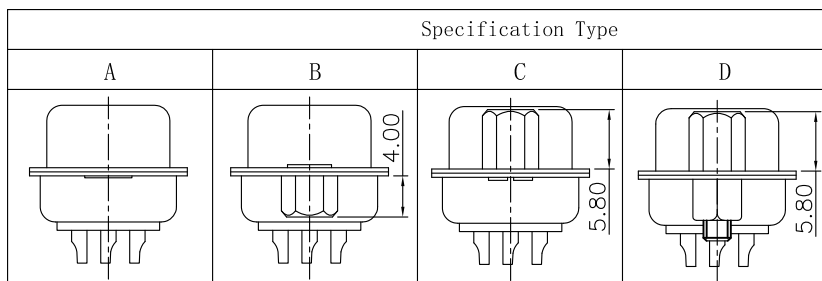

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.28		SIZE: A4	LINEAR 0.00±0.25	ANGLES X°±3°	APPROVED	Wang_jr	22.10.28	WLDBMO-5041XX223	
				0.00±0.10	X°X' ±2°	CHECK	XueZe_Ma	22.10.28	TITLE: DB 50M MALE SOLDERING		REV: A0
						DRAWN	LanXuan_Hou	22.10.28			SHEET: 1/1