
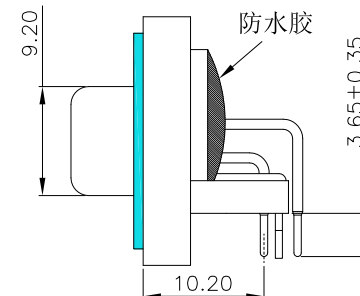
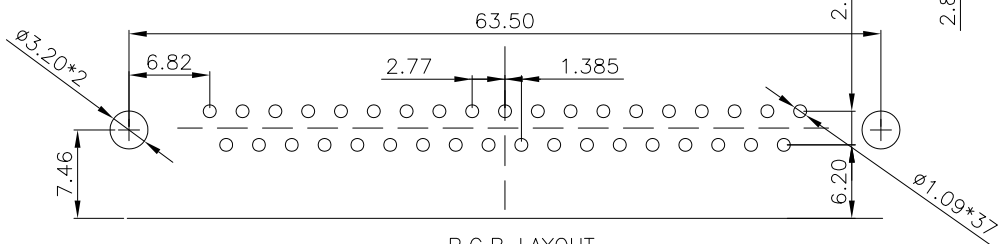
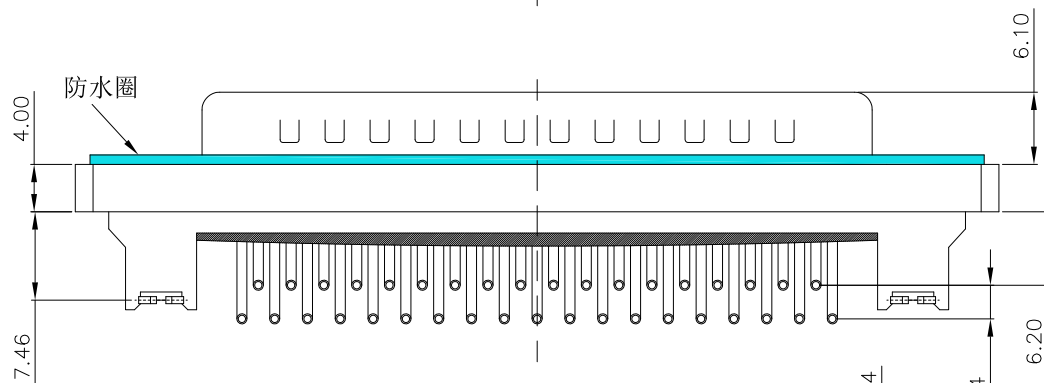


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

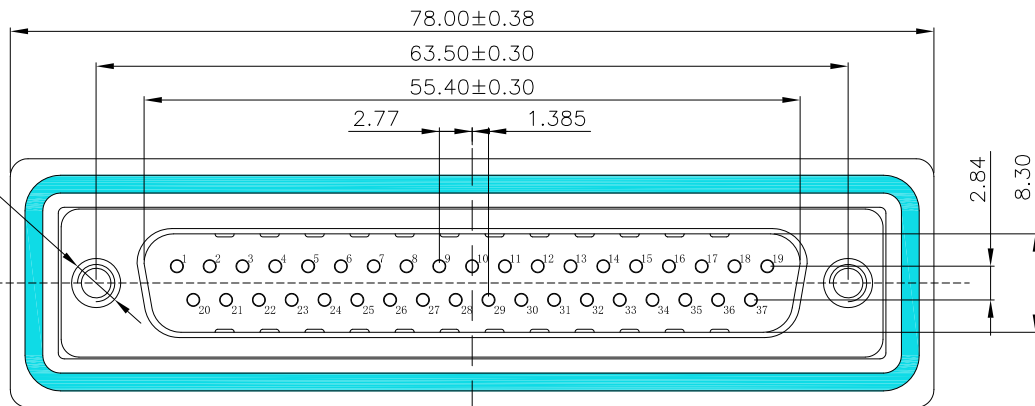

NOTE


- 1.ELECTRICAL:
  - 1-1 INSULATOR RESISTANCE: 3000MEG OHMS MIN AT 500V DC.
  - 1-2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S
  - 1-3 RATED VOLTAGE: 500V AC Min
  - 1-4 CURRENT RATING: 5A.
  - 1-5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- 2.ENVIRONMENTAL
  - TEMPERATURE RANGE: -55°C TO + 105°C.
  - 3.SALT SPRAY: 48H;
  - 4.IP RATING: IP67

P/N: WLDBM9-3711AA237

Q'TY of Contact  
 Contact Type  
 1: DIP  
 Specification Type:  
 A-Type A

Plating Contact  
 1: Gold Flash  
 3: Au: 3U"  
 Housing color  
 A: Black  
 K: White

Item	Name	Material	Surface Plating
1	Housing	PBT+GF	BLACK
2	Waterproof Frame	Silica gel	BLUE
3	Waterproof ring	PA66	BLACK
4	Contact	Copper alloy	Gold allover
5	Shell	Spec-sd	Nickel Plating
6	PCB-Lock	Copper alloy	Tin Plating
7	Rivet	Copper alloy	Nickel Plating

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.03.19	LINEAR	ANGLES	1:1	Wang_jr	22.03.19	WLDBM9-3711AA237	ENDE05	
			0.0±0.35	X°REF±6°	APPROVED	XueZe_Ma	22.03.19	TITLE: DR 37Pin Male Lathe Terminal		REV: A0    SHEET: 1/1
			0.00±0.25	X°±3°	CHECK	LanXuan_Hou	22.03.19			
			0.000±0.10	X°X' ±2°	DRAWN					