

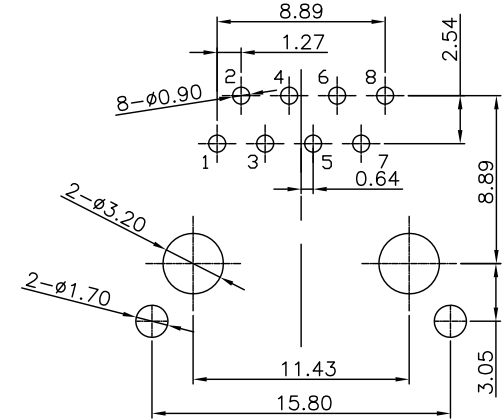

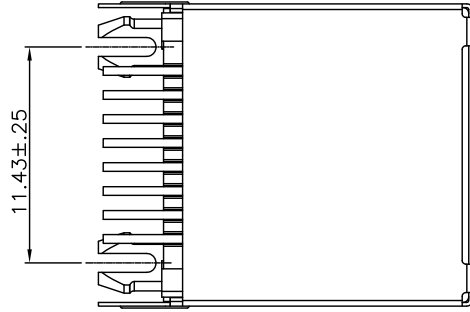
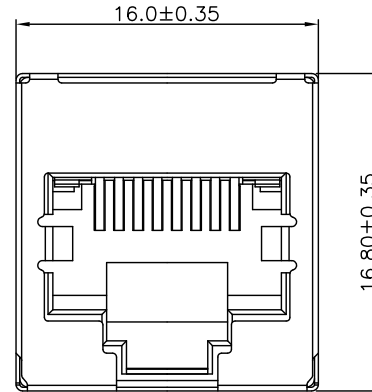


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

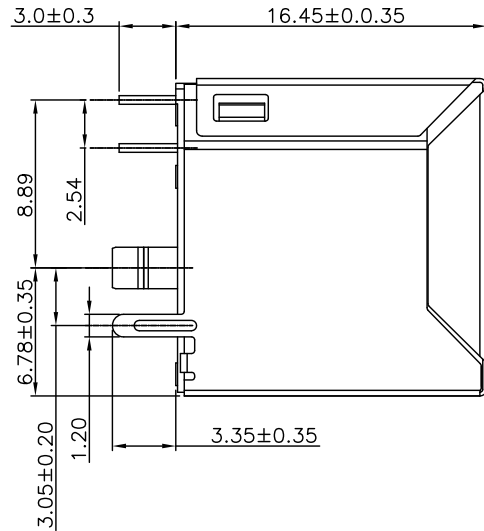

PCB Layout

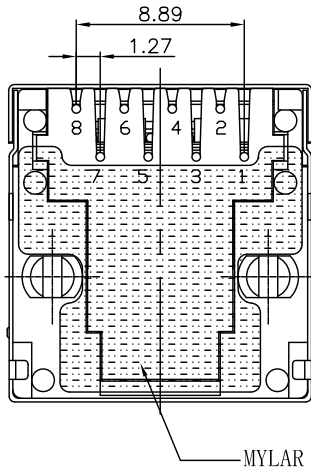

NOTE:

1. MATERIAL SPECIFICATION:

- 1-1. HOUSING: PBT UL94V-0 BLACK
- 1-2. CONTACT: PHOSPHOR BRONZE $\phi 0.46\text{mm}$
- 1-3. SHELL: 0.20mm THICKNESS COPPER ALLOY
- 1-4. MYLAR YELLOW

2. PLATING SPECIFICATION:

- 2-1. CONTACT: GOLD FLASH PLATING OVER NICKEL.
- 2-2. SHIELD: NICKEL PLATED.

3. MECHANICAL PERFORMANCE:

- 3-1. UNMATING FORCE: 2.04 KG.F MAX.
- 3-2. MATING FORCE: 2.04 KG.F MAX.
- 3-3. DURABILITY: 750 CYCLES MIN.

4. ELECTRICAL PERFORMANCE:

- 4-1. VOLTAGE RATING: 125 VAC RMS
- 4-2. CURRENT RATING: 1.5A
- 4-3. CONTACT RESISTANCE: 40m Ω MAX.
- 4-4. INSULATION RESISTANCE: 500M Ω MIN @ 100V DC.
- 4-5. WITHSTANDING VOLTAGE: 500V DC RMS 50HZ. 1MIN.
- 5. OPERATING TEMPERATURE: -40°C ~ +85°C

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	23.11.07		LINEAR	ANGLES	1:1	Wang_jr	23.11.07	WLR4F0-0811A4050	ENDE05	
			UNIT:mm	X'±3°	APPROVED	Han_Gao	23.11.07	TITLE:			
			SIZE: A4	X'X' ±2°	DESIGNER	Ou_jiang	23.11.07	RJ45 8P8C 立插 有壳无灯 前脚3.05			REV: A0 SHEET: 1/1