



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS



TOP VIEW

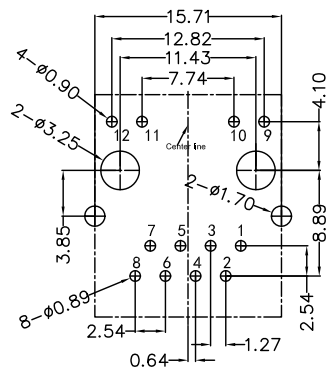


RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE


**MATERIAL:**  
 HOUSING: PA46,UL94V-0,BLACK.  
 TERMINAL: PHOSPHOR BRONZE  $\varnothing=0.46\text{MM}$ , G/FU" GOLD PLATING.  
 SHIELD: C2680,T=0.20MM,20U" MIN NICKEL PLATING ON ALL AREA.

**MACHANICAL:**  
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
 INSERTION FORCE: 2.2KG.F MAX.  
 RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.  
 OPERATING TEMPERATURE:  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ .  
 STORAGE TEMPERATURE:  $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$ .  
 ALL CRITICAL DIMENSIONS WITH "\*\*\*"


**ELECTRICAL:**  
 VOLTAGE: 125 VOLTS AC.  
 CURRENT RATING : 1.5AMP.  
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1 MIN.  
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE.  
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.




LEFT SIDE VIEW

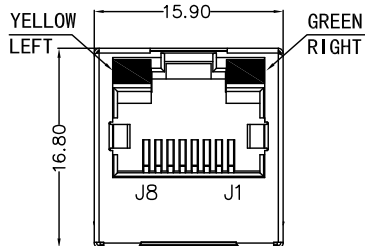


FRONT VIEW




RIGHT SIDE VIEW



BACK VIEW




BOTTOM VIEW

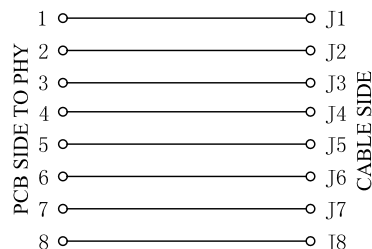

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V



REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	Wang_jr	21.11.17	WLR4FO-1211A0096	ENDE05	
			0.0±0.35	X'REF±6°	APPROVED	Han_Gao	21.11.17	TITLE:RJ45 8P8C 立插 屏蔽带灯 (左黄右绿)		
			0.00±0.25	X'±3°	DESIGNER	Zijun_Huang	21.11.17			
			UNIT:mm		DRAWN			REV: A0	SHEET: 1/1	