


The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS

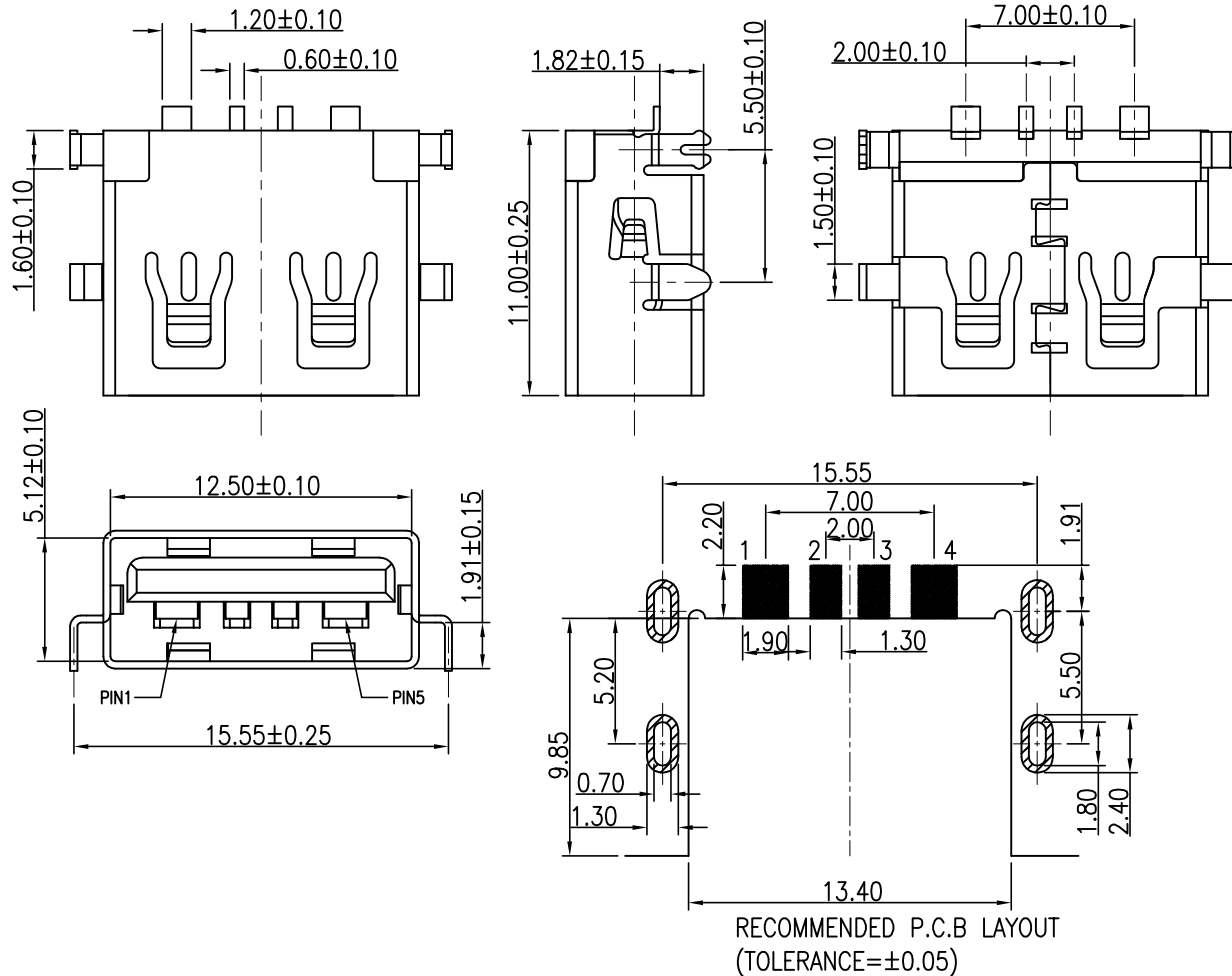

备注:

1. 材质:外壳:SPCC  
端子:C2680  
塑胶:LCP+30% G.F 黑色
2. 电镀规格:外壳:全部区域镀亮镍60u"  
电镀符合"RoHS"标准,  
端子:镀镍底50u", 接触区域镀金3u",  
焊接区镀锡80u"Min. (高温锡)
3. LCP胶芯耐高温245°~260°
4. 电气性能:  
A. 电流:5A MIN 250V AC.  
B. 导通电阻: 30 mΩ.  
C. 绝缘电阻:1000 MΩ MINI 300V/AC  
D. 耐电压: 500V AC 1M
5. 环境性能  
A. 操作温度-20° C TO 85° C
6. 机械特性  
A. USB插拔测试:每小时200个周期,插拔3000周期,  
功能无损伤。(寿命: 3000次 )  
B. USB插拔力测试:插入力≤3.5kg,拔出力1~3.5kg  
测试5次取平均值.插拔1500次后拔出力0.8~3.5kg.  
C. 盐雾24H,盐雾收集量1.5mL,温度35°,湿度47%.  
D. 接触PIN针与胶芯保持力≥0.8kg.
7. 要求符合USB 2.0标准.

PIN	SLGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLU2F9-0481A1255	ENDE05	
			UNIT:mm	X'±3'	DESIGNER	Ding_bo	21.01.13	TITLE: USB2.0 A TYPE SOCKET SMT L=11.0mm		REV: A0	SHEET: 1/1
			SIZE: A4	0.00±0.10	X'X' ±2'	DRAWN	Ou_jian	21.01.13			