
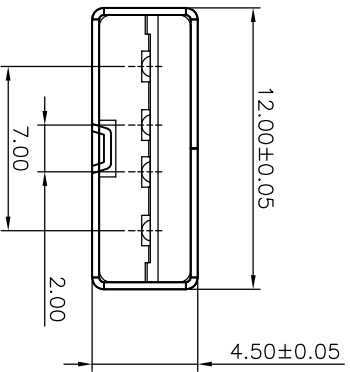
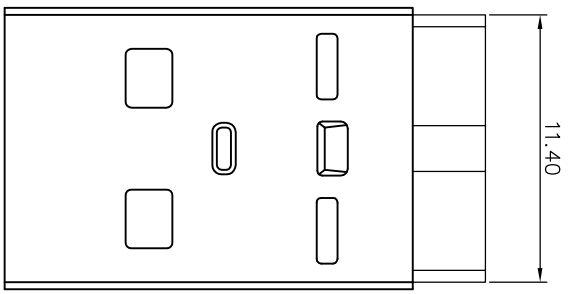


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

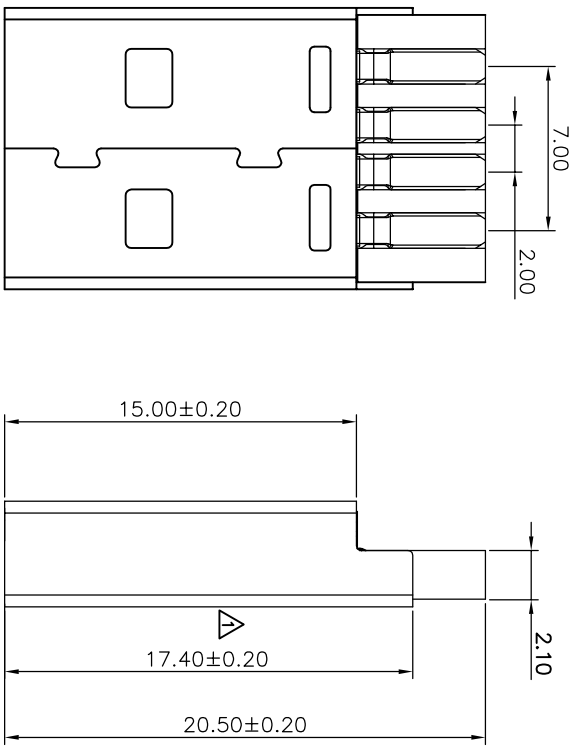

- NOTE:
- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:PBT WHITE UL94V-0
 - 1-2.CONTACTS:G2680 T=0.15MM
 - 1-3.SHELL: SPCC T=0.3MM
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: 30~50u" MIN NICKEL ALL OVER GOLD FLASH IN CONTACT 80~100U"MIN.TIN IN SOLDER AREA.
 - 2-2. SHELL: Ni 80u" MIN. UNDER PLATED OVER ALL.
 - 3.MECHANICAL PERFORMANCE:
 - 3-1.INSERTION FORCE: 3.57kgf MAX
 - 3-2.REMOVAL FORCE: 1.02kgf MIN
 - 3-3.DURABILITY: 3000 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING:1.5A
 - 4-2.VOLTAGE RATING:30V MAX
 - 4-3.CONTACT RESISTANCE: 30m Ohm MAX.
 - 4-4.INSULATION RESISTANCE: 1000MΩ MIN
 - 4-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
 - 5.ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -20°C~+85°C.

- PART NO.: WLU2M0-04 4 X X X 182
- CONTACT
 - PLATING: 1-G/F
 - 2-AU 3U"
 - 5-AU 15U"
 - 6-AU 30U"
 - HOUSING: 1-PBT
 - 2-LCP
 - HOUSING COLOUR: A-BLACK K-WHITE

A	1	2	3	4	5	6	7	8		
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements										
RoHS										
REV.	REVISION RECORD		DATE		SCALE:		NAME		DATE	
A0	NEW RELEASE		21.01.13		1:1		Wang_jir		21.01.13	
A1	17.3 cho 17.4 Δ		23.08.11		GENERAL TOLERANCES		DESIGNER		21.01.13	
					LINEAR		DING_BO			
					ANGLES		OU_JIAN			
					UNIT:mm					
					SIZE: A4					
					0.0±0.35					
					X°REF±6°					
					X°±3°					
					X°X' ±2°					
					DRAWN					
					APPROVED					
					DATE					
					21.01.13					
					PART. NO.:					
					WLU2M0-044XXX182					
					TITLE:					
					USB 2.0 A/M SOLDER					
					DWG. NO.:					
					ENDE05					
					REV: A1					
					SHEET: 1/1					
					Maotian Technology Co., Ltd					