
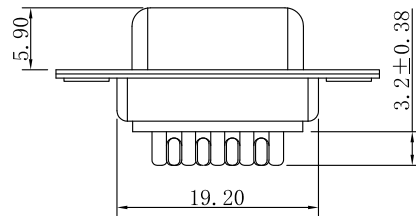



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

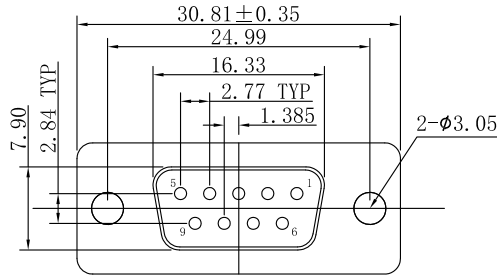

CHARACTERISTICS/特性:

- 1、 RATED VOLTAGE: 250V AC CD
- 2、 RATED CURRENT: 3.0AMP
- 3、 CONTACT RESISTANCE: 30mΩ Max.
- 4、 INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- 5、 Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、 Operating temperature: -55℃~105℃
- 7、 INSERTION/EXTRACTION FORCE PER CONTACT: 3.0Kg Max  
0.3Kg Min.

Specification Type

A	B	C

ORDER INFORMTION

P/N: WLDBF0-094XXX015

Number of Contact

Plating Contact  
 1: Gold Flash  
 3: Au: 3U"  
 6: Au: 30U"

SCREW  
 A: NO SCREW  
 B: BACK SCREW  
 C: FRONT SCREW

Housing color  
 A: Black  
 S: Nature

REV.	REVISION RECORD	DATE	UNIT: mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.03.11	WLDBF0-094XXX015	ENDE05	
			0.0±0.35	X° REF±6°	DESIGNER	Ding_Bo	21.03.11	TITLE: DB 9F SOLDERING		REV: A0	SHEET: 1/1
			0.00±0.25	X° ±3°	DRAWN	Ou_Jian	21.03.11				
			SIZE: A4	0.000±0.10	X° X'±2°						