
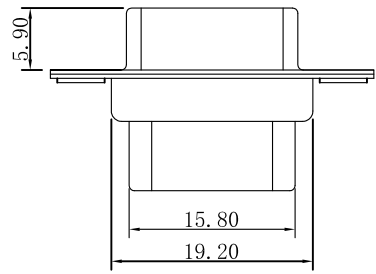



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

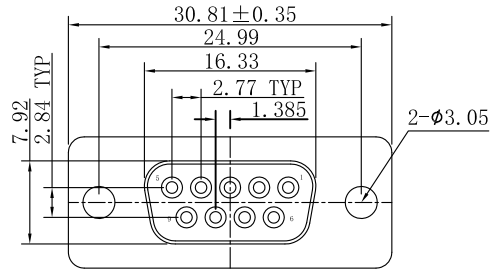

CHARACTERISTICS:

- 1、 RATED VOLTAGE: 250V
- 2、 RATED CURRENT: 3.0AMP
- 3、 CONTACT RESISTANCE: 30mΩ Max.
- 4、 INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- 5、 Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、 Operating temperature: -55℃~105℃
- 7、 INSERTION/EXTRACTION FORCE PER CONTACT: 3.0Kg Max  
0.3Kg Min.

ORDER INFORMTION

Specification Type		
A	B	C

P/N: WLDBF0-09 7XXX023

Number of Contact: 7

Plating Contact:  
 1: Gold Flash  
 3: Au: 3U"  
 6: Au: 30U"

SCREW:  
 A: NO SCREW  
 B: BACK SCREW  
 C: FRONT SCREW

Housing color:  
 A: Black  
 S: Nature

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.03.11	WLDBF0-097XXX023	ENDE05	
			UNIT: mm	0.00 ± 0.25	X° ± 3°	DESIGNER	Ding_Bo	21.03.11	TITLE:		
			SIZE: A4	0.000 ± 0.10	X° X' ± 2°	DRAWN	Ou_Jian	21.03.11	DEC 09F TERMINAL CRIMP		
									REV: A0	SHEET: 1/1	