
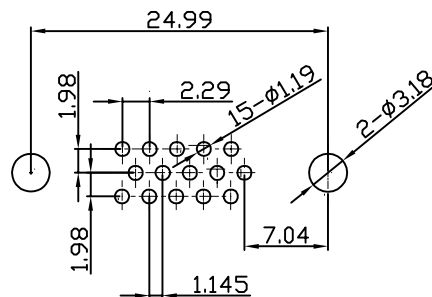


The product using material and processing must conform to the  
"WI-PZ-001"HSF technical standard control requirements

RoHS

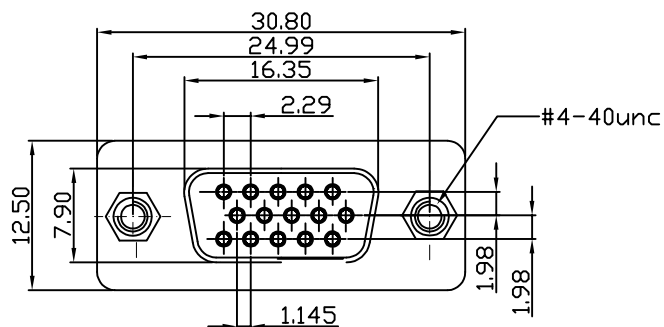

#### MATERIALS AND FINISH



SHELL : STEEL MATERIAL, TIN FINISHED  
INSULATOR : PBT THERMOPLASTIC, 30% GLASS  
FILLED, BLUE COLOR  
CONTACT MATERIAL : BRASS  
CONTACT FINISH : SELEVITE GOLD FINISHED  
RIVETED INSERT: BRASS MATERIAL , TIN FINISHED  
JACK SCREWS : BRASS MATERIAL , NICKEL FINISHED  
WITH #4-40 THREADED ASSEMBLED

#### ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS  
CONTACT RESISTANCE : 30 MILLIOHMS MAX.  
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN  
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.  
TEMPERATURE RATING : -55°C ~ +105°C

P/N: WLDBF0-15 1 X X 0 153

PLATING: 7-Sn COLOUR: G-BLUE

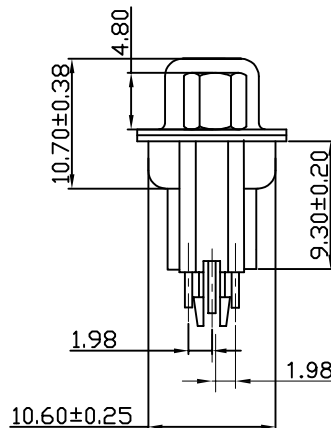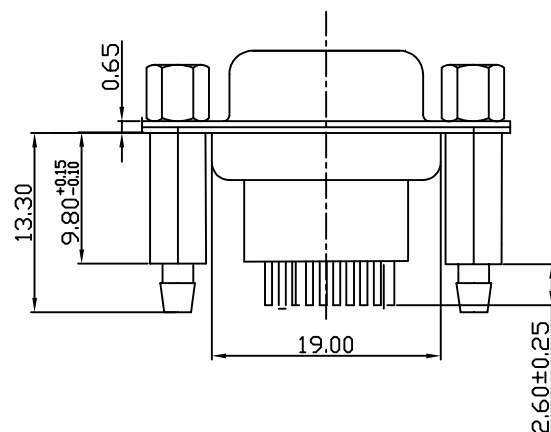

|      |                 |          |                                                                                     |                    |          |               |             |          |                                                               |                   |                                                                                                                      |
|------|-----------------|----------|-------------------------------------------------------------------------------------|--------------------|----------|---------------|-------------|----------|---------------------------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------|
| REV. | REVISION RECORD | DATE     |  | GENERAL TOLERANCES |          | SCALE:<br>1:1 | NAME        | DATE     | PART.NO:<br>WLDBF0-151XX0153                                  | DWG.NO:<br>ENDE05 | <br>WanLian Teconology Co., Ltd |
| A0   | NEW RELEASE     | 21.01.13 |                                                                                     | LINEAR             | ANGLES   | APPROVED      | Wang_jr     | 21.01.13 |                                                               |                   |                                                                                                                      |
|      |                 |          |                                                                                     | 0.0±0.35           | X°REF±6° |               |             |          |                                                               |                   |                                                                                                                      |
|      |                 |          | UNIT:mm                                                                             | 0.00±0.25          | X°±3°    | DESIGNER      | Han_Gao     | 21.01.13 | TITLE:<br>HDS 15F 180°DIP RIVETING LOCK COPPER<br>COLUMN 9.80 |                   |                                                                                                                      |
|      |                 |          | SIZE: A4                                                                            | 0.000±0.10         | X°X' ±2° | DRAWN         | Zijun_Huang | 21.01.13 |                                                               |                   |                                                                                                                      |
|      |                 |          |                                                                                     |                    |          |               |             |          |                                                               | REV: A0           | SHEET: 1/1                                                                                                           |