
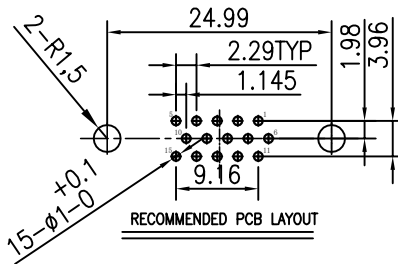


The product using material and processing must conform to the
"WI-PZ-001"HSF technical standard control requirements

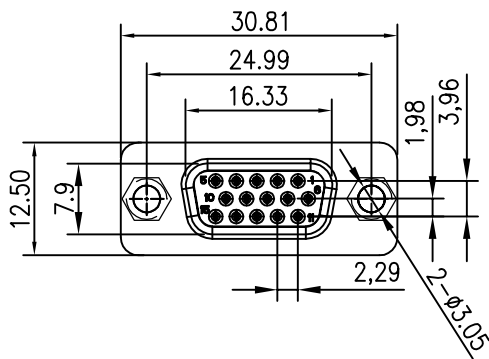

NOTE:

1. MATERIAL:

- 1.1 HOUSING: PBT+30%GF, UL94V-0, COLOR: BLACK.
- 1.2 TERMINAL: COPPER ALLOY.
- 1.3 SHELL: SPCC
- 1.4 COPPER POST: COPPER ALLOY.
- 1.5 SCREW: COPPER ALLOY OR SPCC

2. PLATING:



- 2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA
80u" Min. TIN PLATED ON SOLDER TAIL
50u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL: 50u" Min, NICKEL PLATED OVERALL
- 2.3 COPPER POST: TIN PLATED OVERALL
- 2.4 SCREW: NICKEL PLATED OVERALL

3. SPECIFICATIONS:

VOLTAGE: 250 VAC(RMS) MAX.
CURRENT RATING: 3 AMPERE PER CONTACT
CONTACT RESISTANCE: 25 MILLIOHMS MAX.
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC(RMS)
MATING FORCE: 5.1Kg.Max.
UNMATING FORCE: 1.0Kg min.
OPERATING TEMPERATURE: -25°C ~ +85°C

P/N: WLDBF0-15 1 X X 0 76-114

PLATING: 1-G/F COLOUR: A-BLACK

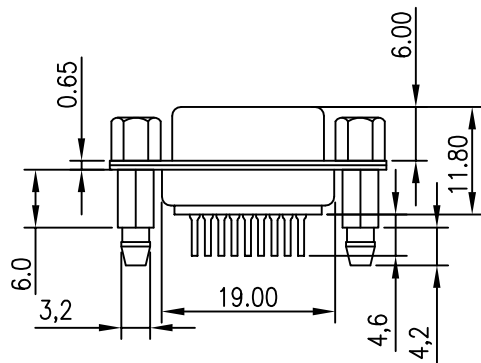

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART NO:	DWG NO:		WanLian Tecnology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_Jr	21.01.13	WLDBF0-151X076-114	ENDE05		
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: HDIP 15F 180°DIP 铆锁 6.0*11.7 铜柱		REV: A0	SHEET: 1/1
				0.00±0.25	X°±3°	DRAWN	ZiJun_Huang	21.01.13				
				UNIT: mm								
				SIZE: A4								