
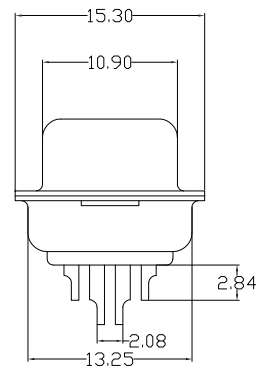
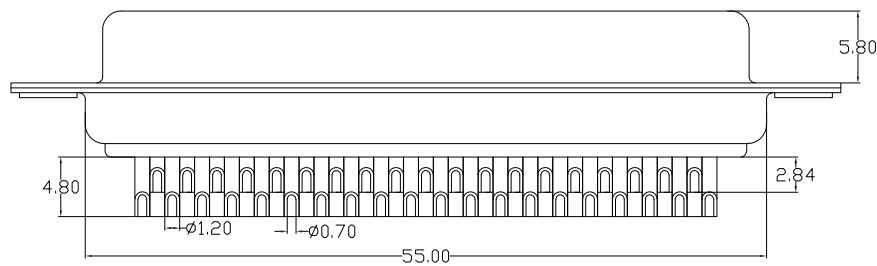


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

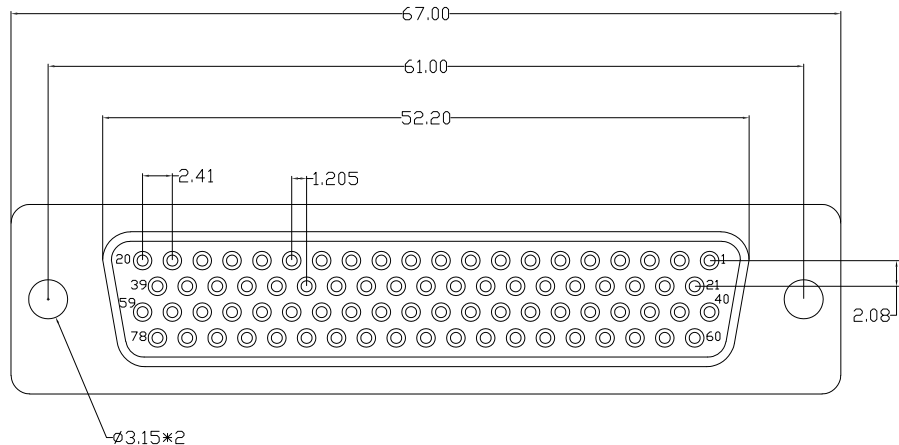

NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.HOUSING:PBT FIBER 30% (UL94V-0)  
 1-2.CONTACTS:BRASS  
 1-3.SHELL: STAINLESS STEEL  
 2.PLATING SPECIFICATION:  
 2-1.CONTACTS:  
 NI 40U" MIN.TIN 100u" MIN UNDER PLATED OVER ALL.  
 AU PLATED ON THE FUNCTIONAL AREA OF CONTACT.  
 2-2. SHELL:  
 NI 30U" MIN. UNDER PLATED OVER ALL.  
 3.ELECTRICAL PERFORMANCE:  
 4-1.CURRENT RATING:5A  
 4-2.VOLTAGE RATING:300V AC MAX  
 4-3.CONTACT RESISTANCE: 30mΩ MAX.  
 4-4.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC MIN.  
 4.ENVIRONMENTAL PERFORMANCE:  
 OPERATING TEMPERATURE: -55°C~+105°C.

WLDBF0-78 4 X X 0075  
 COLOUR:  
 A:Black  
 K:White  
 PLATING:  
 1-G/F  
 2-AU 3U"  
 5-AU 15U"  
 6-AU 30U"

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLDBF0-784XX0075	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Ding_bo	21.01.13	TITLE:		REV: A0    SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Ou_jian	21.01.13	HDB 78 female welding		