
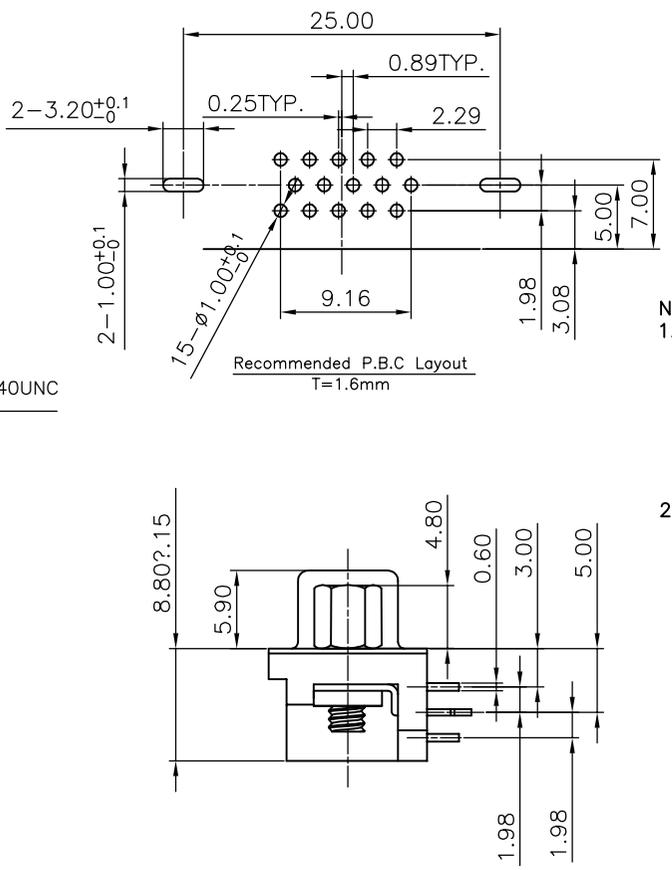


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

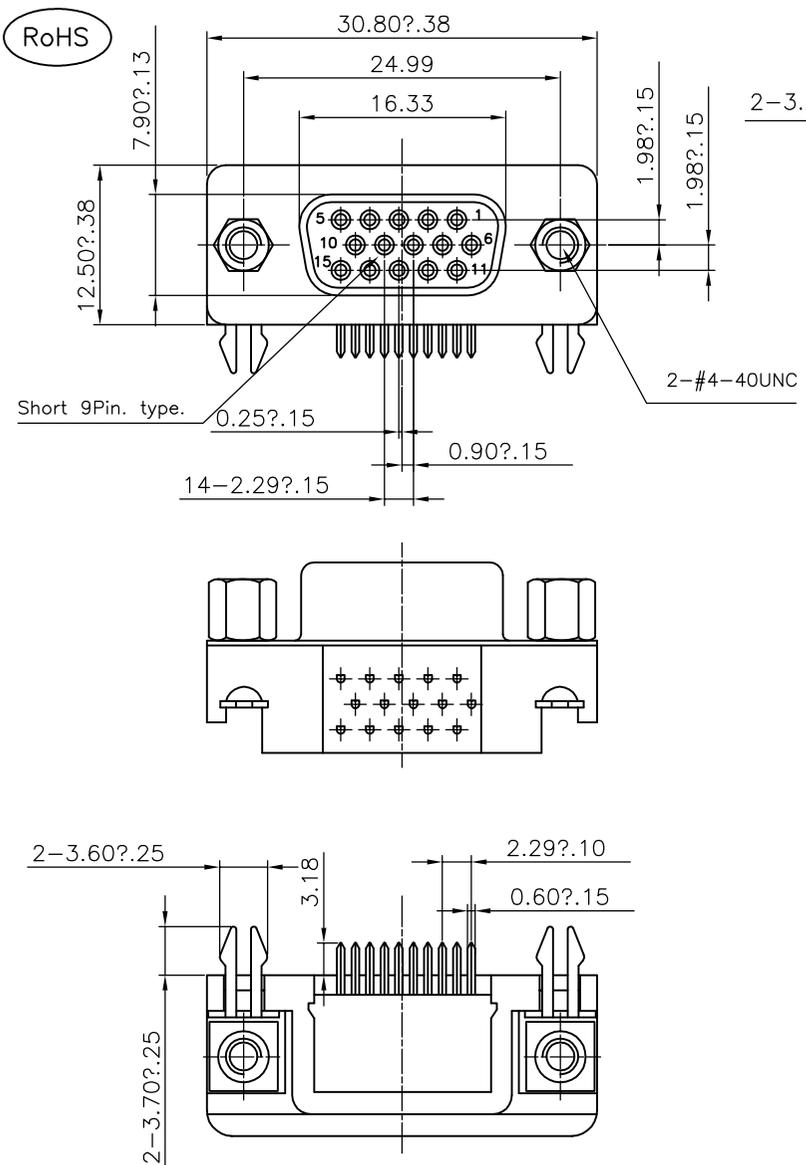

- NOTE:
1. MATERIAL:
- 1.1 INSULATOR: PBT+30%GF, COLOR: BLUE.
 - 1.2 COVER: PBT+30%GF, COLOR: BLUE
 - 1.3 CONTACT: COPPER ALLOY.
 - 1.4 SHELL: SPCC
 - 1.5 SQUARE RIVET: BRASS
 - 1.6 GROUND HARPOON: SPCC
 - 1.7 SCREW: SPCC
2. PLATING:
- 2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA
80u" Min. TIN PLATED ON SOLDER TAIL
50u" Min. NICKEL UNDER-PLATED
 - 2.2 SHELL: NICKEL PLATED OVERALL
 - 2.3 SQUARE RIVET: NICKEL PLATED OVERALL
 - 2.4 GROUND HARPOON: TIN PLATED OVERALL
 - 2.5 SCREW: NICKEL PLATED OVERALL
3. SPECIFICATIONS:
- VOLTAGE: 250 VAC(RMS) MAX.
 - CURRENT RATING: 3 AMPERE PER CONTACT
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 5000 MEGOHMS MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC(RMS)
 - MATING FORCE: 5.1Kg. Max.
 - UNMATING FORCE: 1.0-4.0Kg. Min.
 - OPERATING TEMPERATURE: -25° ~ +85°
4. DESIGN STANDARD ACCORDING TO D-SUB SPECIFICATION.

P/N: WLDBF9-15 1 X X 0 131

PLATING: 7-Sn COLOUR: G-BLUE

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBF9-151XX0131	DWG.NO: ENDE05		
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.01.13	TITLE:			
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.01.13	HDR3.08 15F 90°IP 简易 铆锁			
											REV: A0	SHEET: 1/1