
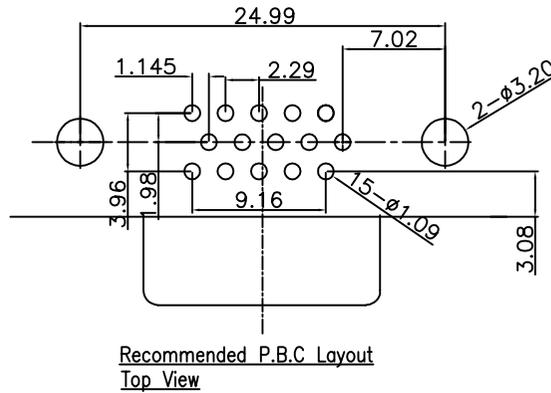


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

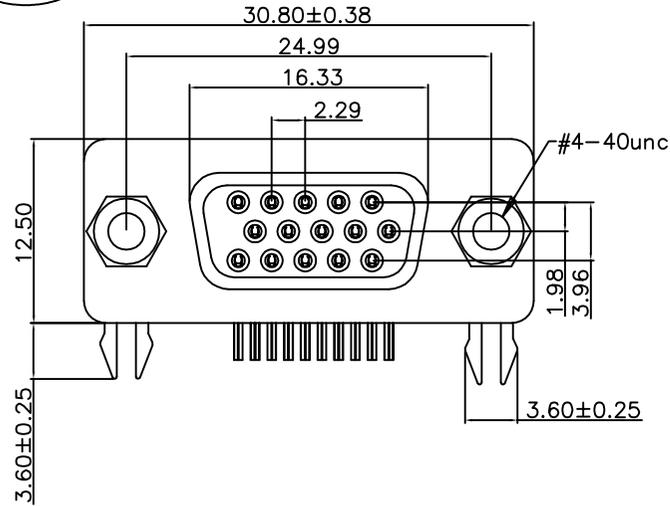

NOTE:

1. MATERIAL:



- 1.1 HOUSING: PBT+30%GF, UL94V-0, COLOR: BLUE OR BLACK
- 1.2 TERMINAL: COPPER ALLOY.
- 1.3 SHELL: SPCC
- 1.4 SCREW: SPCC OR BRASS
- 1.5 GROUNDING: SPCC
- 1.6 SQUARE RIVET: BRASS

2. PLATING:

- 2.1 CONTACT: SELECTIVE GOLD PLATED ON CONTACT AREA
80u" Min. TIN PLATED ON SOLDER TAIL
50u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL: 50u" Min, NICKEL PLATED OVERALL
- 2.3 GROUNDING: 50u" Min, TIN PLATED OVERALL.
- 2.4 SCREW: 50u" Min, NICKEL PLATED OVERALL.
- 2.5 SQUARE RIVET: 50u" Min, NICKEL PLATED OVERALL.

3. SPECIFICATIONS:

VOLTAGE: 500 VAC(RMS) MAX.
CURRENT RATING: 3 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)
MATING FORCE: 5.1Kg.Max.
UNMATING FORCE: 1.0Kg MIN.
OPERATING TEMPERATURE: -25? ~ +85?

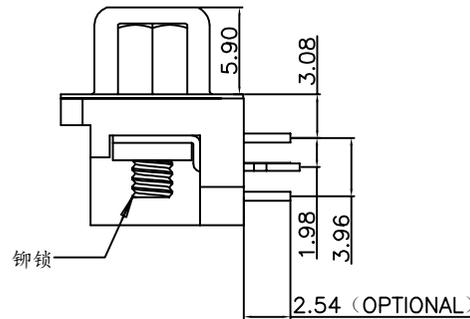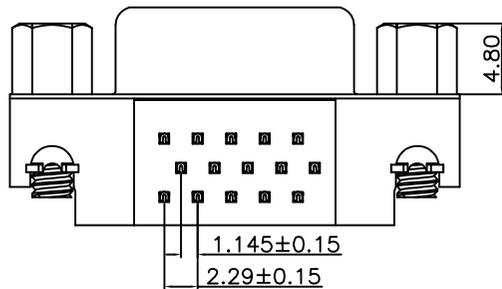

P/N: WLDBF9-15 1 X X 0 135

PLATING:
1-G/F
2-AU 3U"
7-Sn

COLOUR:
A-BLACK
W-WHITE
E-YELLOW
G-BLUE

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1	APPROVED	Wang_jr	21.01.13	WLDBF9-151XX0135	
			0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.01.13	TITLE:			REV: A0
			0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.01.13	HDR3.08 15F 90°DIP 铆锁 简易鱼叉 无边			SHEET: 1/1