

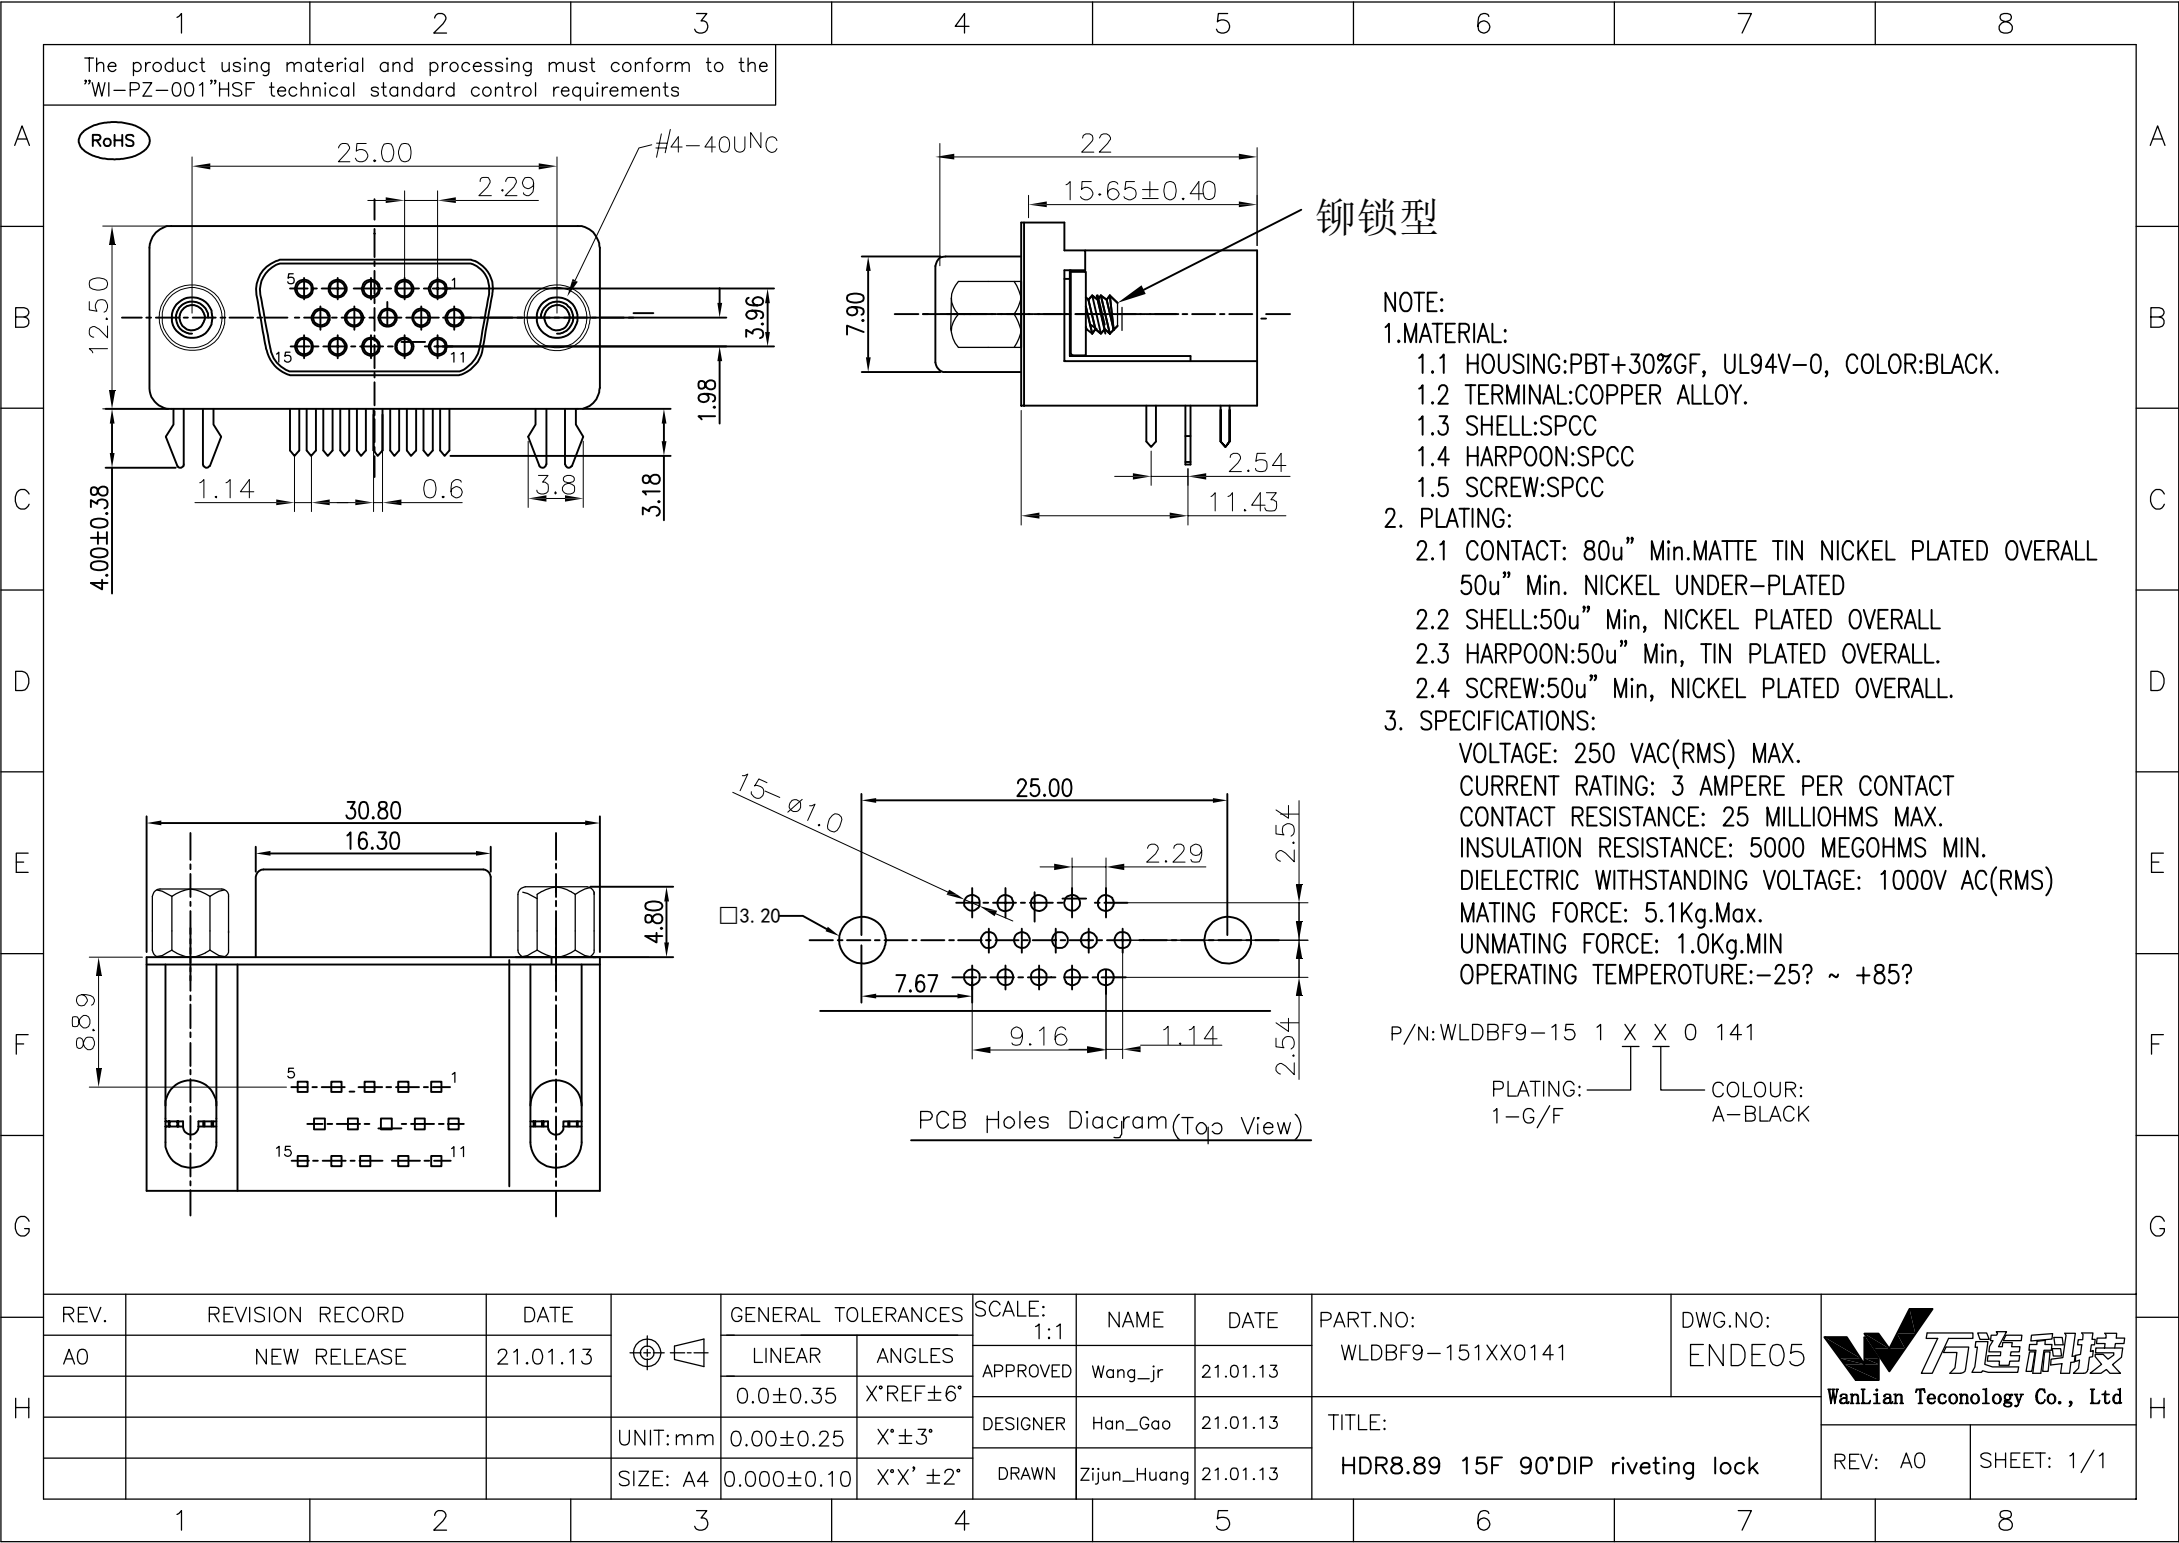


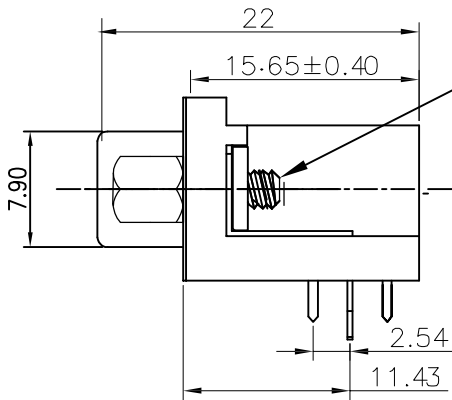

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

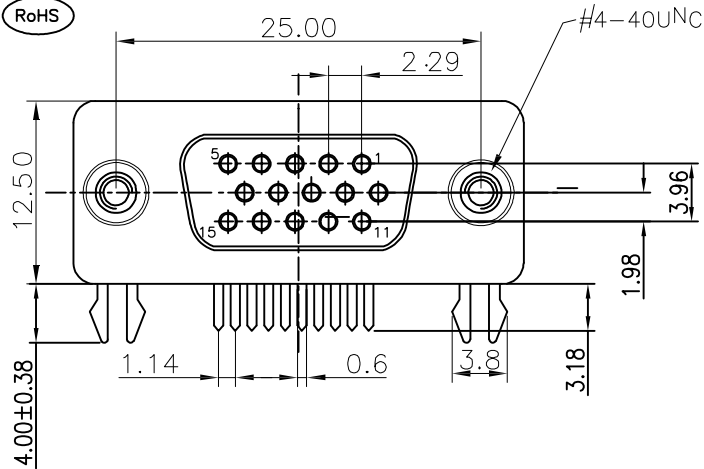

NOTE:

1. MATERIAL:

- 1.1 HOUSING:PBT+30%GF, UL94V-0, COLOR:BLACK.
- 1.2 TERMINAL:COPPER ALLOY.
- 1.3 SHELL:SPCC
- 1.4 HARPOON:SPCC
- 1.5 SCREW:SPCC

2. PLATING:



- 2.1 CONTACT: 80u" Min.MATTE TIN NICKEL PLATED OVERALL 50u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL:50u" Min, NICKEL PLATED OVERALL
- 2.3 HARPOON:50u" Min, TIN PLATED OVERALL.
- 2.4 SCREW:50u" Min, NICKEL PLATED OVERALL.

3. SPECIFICATIONS:

VOLTAGE: 250 VAC(RMS) MAX.
CURRENT RATING: 3 AMPERE PER CONTACT
CONTACT RESISTANCE: 25 MILLIOHMS MAX.
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC(RMS)
MATING FORCE: 5.1Kg.Max.
UNMATING FORCE: 1.0Kg.MIN
OPERATING TEMPERATURE:-25? ~ +85?

P/N:WLDBF9-15 1 X X 0 141

PLATING: 1-G/F COLOUR: A-BLACK

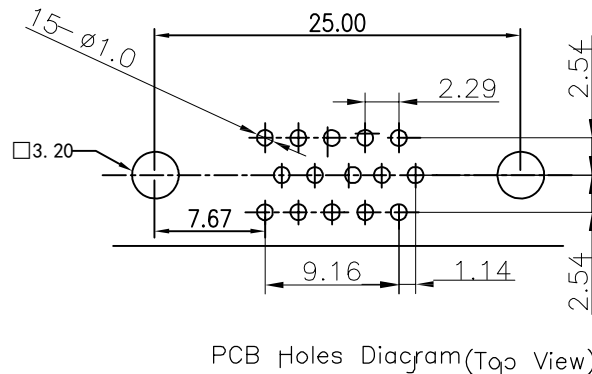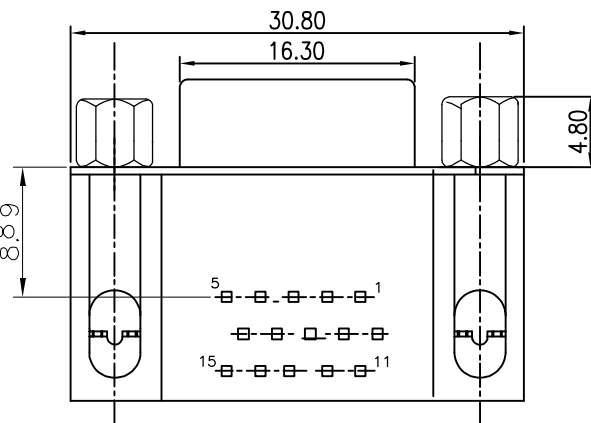

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
				LINEAR	ANGLES						
A0	NEW RELEASE	21.01.13		0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.01.13	WLDBF9-151XX0141	ENDE05	
				0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13	TITLE: HDR8.89 15F 90°DIP riveting lock		
				0.000±0.10	X°X'±2°	DRAWN	Zijun_Huang	21.01.13			

WanLian Teconology Co., Ltd

REV: A0 SHEET: 1/1