

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

A

B

C



D

E

F

G

H

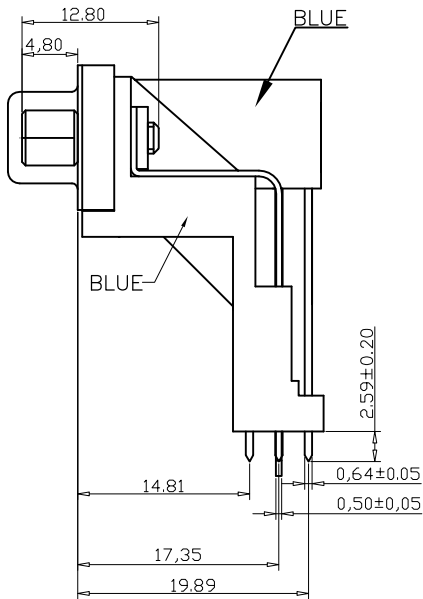
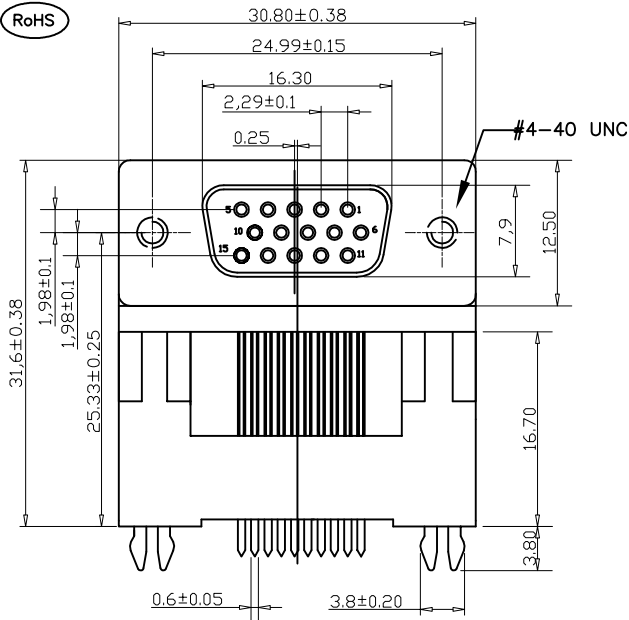


NOTES:
MATERIALS:
1.INSULATOR:HOUSIN: PBT+30%G/F UL94V-0, COLOR:BLACK OR BLUE
BRACKET: PBT+30%G/F UL94V-0, COLOR:BLACK OR BLUE
2.CONTACT:BRASS(C2680 H65)
3.CONTACT PLATED: GOLD PLATING ON CONTACT AREA, 100U"
MIN MATTE TIN PLATED ON SOLDER TAILS
50U" MIN NICKEL PLATED UNDER OVERALL.

4.SHELL: SPCC-SD,NICKEL PLATING OVER COPPER
5.BOARD LOCK: SPCC-SD,TIN PLATING OVER COPPER
6.RIVET: COPPER ALLOY,NICKEL PLATING
7.SCREW: SPCC-SD,NICKEL PLATING
SPECIFICATION:
1.CONTACT CURRENT RATING: 2 AMP
2.INSULATION RESISTANCE: 1000M OHM MIN AT 500V DC
3.DIELECTRIC WITHSTANDING VOIT: AC 500V(R.M.S)/1 MINUTE
4.OPERATION TEMPERATURE:-55°C TO ±105°C
5.RoHS COMPLIANT

P/N:WLDBF9-15 1 X X 0 149

PLATING: 1-G/F COLOUR: G-BLUE

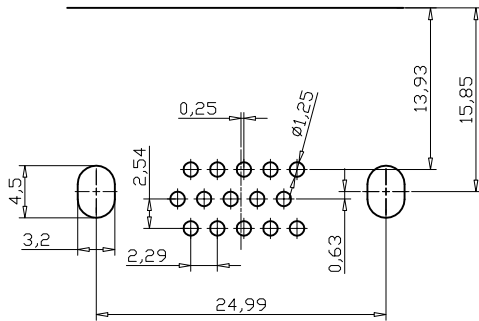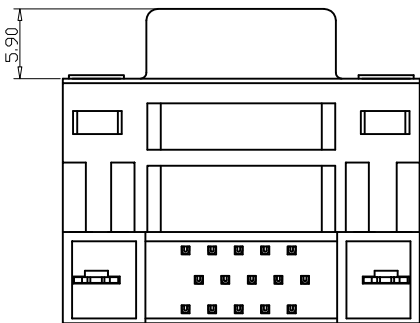

RECOMMEND P.C.B. LAYOUT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLDBF9-151XX0149	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: HDR Elevated 15F 90°DIP Riveting			
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang			21.01.13	REV: A0
			SIZE: A4	0.000±0.10	X°X' ±2°							

REV: A0 SHEET: 1/1