



The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS

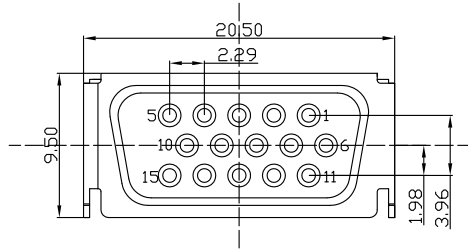

NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING:LCP BLACK UL94V-0
- 1-2.CONTACTS:COPPER ALLOY .
- 1-3.SHELL: SPCC.

2.PLATING SPECIFICATION:

- 2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
- 2-2. SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:





- 3-1.CURRENT RATING:1.5A
- 3-2.VOLTAGE RATING:240V AC.
- 3-3.CONTACT RESISTANCE: 30mΩ Max.
- 3-4.INSULATION RESISTANCE: 100MΩ MIN
- 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min

4.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -55°C~+105°C.

WLDBF9-15 1 X X 0158

PLATING: _____ COLOUR:
1-G/F A:Black
2-AU 3U"
5-AU 15U"

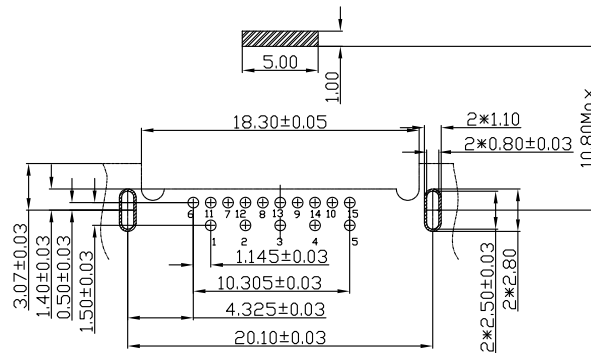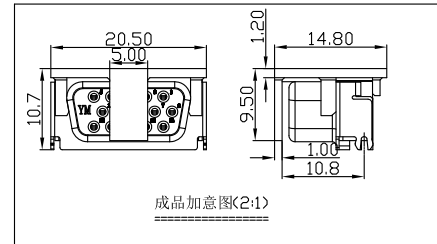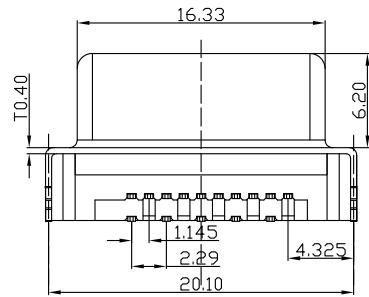

RECOMMENDED PCB LAYOUT

| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE: | NAME | DATE | PART. NO: | DWG. NO: | WanLian Teconology Co., Ltd |
|------|-----------------|------------|------------|--------------------|----------|---------|------------|---------------------------|------------------|----------|---------------------------------|
| A0 | NEW RELEASE | 21. 01. 13 | | LINEAR | ANGLES | 1:1 | Wang_jr | 21. 03. 11 | WLDBF9-151XX0158 | ENDE05 | |
| | | | 0.00±0.25 | X° ±3° | APPROVED | Ding_Bo | 21. 03. 11 | TITLE: | | | |
| | | | 0.000±0.10 | X° X'±2° | DESIGNER | Ou_Jian | 21. 03. 11 | SLIM 15F 90° DIP CL=3.8mm | | | |
| | | | UNIT: mm | | DRAWN | | | | | REV: A0 | SHEET: 1/2 |

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

A

B

C

D

E

F


G

H

48.0
45.0

330

卷料方向




头(尾)各空出10个格子
最少、200PCS/盘

客户标签

0.77
1.53
9.22
Ø0.60

RoHS





15.51
16.90



5 SET



护角

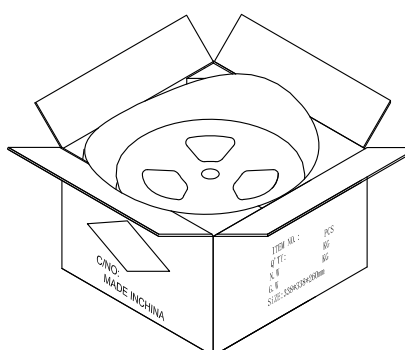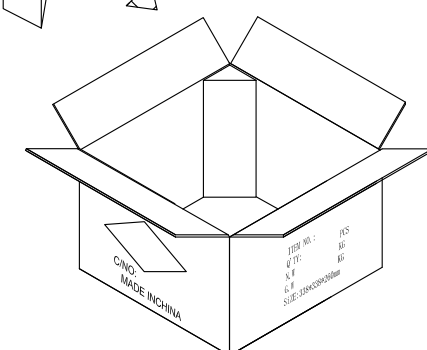

Carton B surface

纸箱规格: K=K 338*338*260mm

NOTE:

- 1、成品组装完成并OQ检查完后、将其装入承载带内、同时用封装胶带冷封
- 2、检查REEL 板状卷带是否松动, 如有松动需要重新贴紧
- 3、全检OK后、将REEL 装盘入PE 袋并放入一包干燥剂
- 4、每个REEL 上必须贴上料号以及数量
- 5、铲平放入REEL 时前带和后带各空格10PCS 不放产品
- 6、每盘装产品200 PCS, 每箱装5 盘, 每一外箱装产品200*5=1000PCS

| | | |
|-----------------|------|--------|
| | REEL | CARTON |
| CONNECTOR (PCS) | 200 | 1000 |

| | | | | | | | | | | | |
|------|-----------------|----------|----------|--------------------|----------|---------------|----------|----------|-------------------------------|--------------------|---------------------------------|
| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | PART. NO: WLDBF9-151XX0158 | DWG. NO: ENDE05 | WanLian Teconology Co., Ltd |
| A0 | NEW RELEASE | 21.01.13 | | LINEAR | ANGLES | APPROVED | Wang_jr | 21.03.11 | | | |
| | | | 0.0±0.35 | X° REF±6° | DESIGNER | Ding_Bo | 21.03.11 | TITLE: | | | |
| | | | UNIT: mm | 0.00±0.25 | X° ±3° | DRAWN | Ou_Jian | 21.03.11 | SLIM 15F 90° DIP CL=3.8mm | | |
| | | | SIZE: A4 | 0.000±0.10 | X° X'±2° | | | | | REV: A0 | SHEET: 2/2 |