
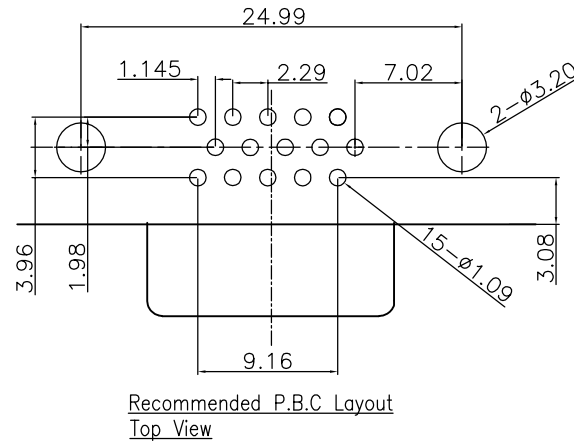


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

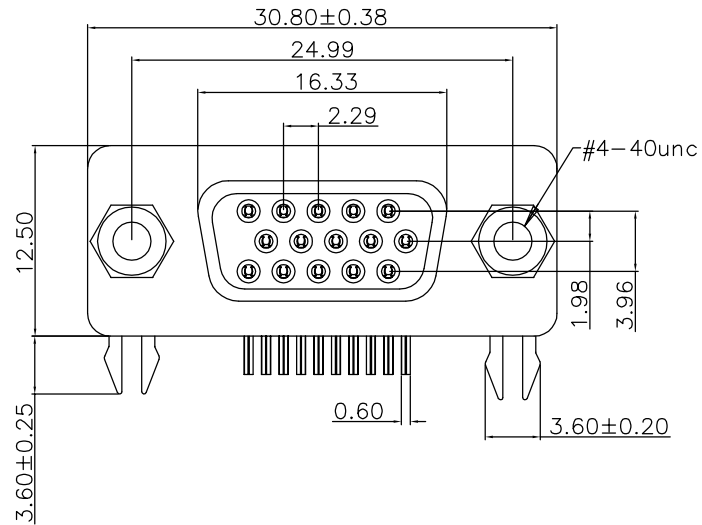

NOTE:

1. MATERIAL:



- 1.1 HOUSING:PBT+30%GF, UL94V-0., COLOR:BLUE.
- 1.2 TERMINAL:COPPER ALLOY.
- 1.3 SHELL:SPCC
- 1.4 SCREW:SPCC
- 1.5 GROUNDING:SPCC

2. PLATING:

- 2.1 CONTACT:
80u" Min. TIN PLATED ON SOLDER TAIL
50u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL:50u" Min, NICKEL PLATED OVERALL
- 2.3 GROUNDING:50u" Min, TIN PLATED OVERALL.
- 2.4 SCREW:50u" Min, NICKEL PLATED OVERALL.

3. SPECIFICATIONS:

- VOLTAGE: 500 VAC(RMS) MAX.
- CURRENT RATING: 3 AMPERE PER CONTACT
- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)
- MATING FORCE: 5.1Kg.Max.
- UNMATING FORCE: 1.0Kg MIN.
- OPERATING TEMPERATURE:-25°C ~ +85°C

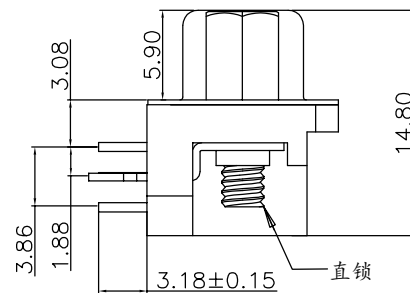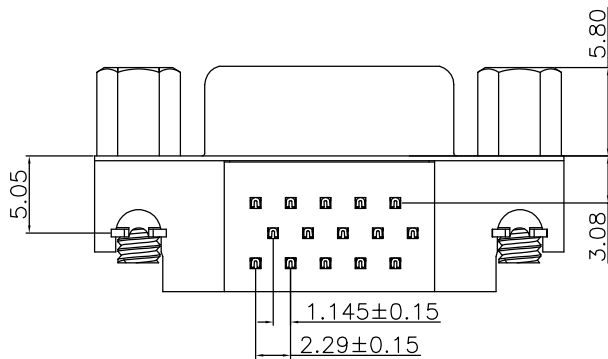

P/N:WLDBF9-15 1 X X 0 163

PLATING: 7-Sn 9-Ni COLOUR: A-BLACK G-BLUE

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1	Wang_jr	21.01.13	WLDBF9-151XX0163	ENDE05	
			0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.01.13	TITLE:			
			0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.01.13	HDR3.08 15F 90°DIP 简易 铆锁 5.8		REV: A0 SHEET: 1/1	