


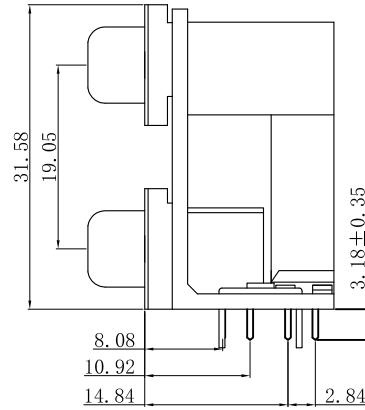


The product using material and processing must conform to the "Wl-PZ-001"HSF technical standard control requirements

RoHS

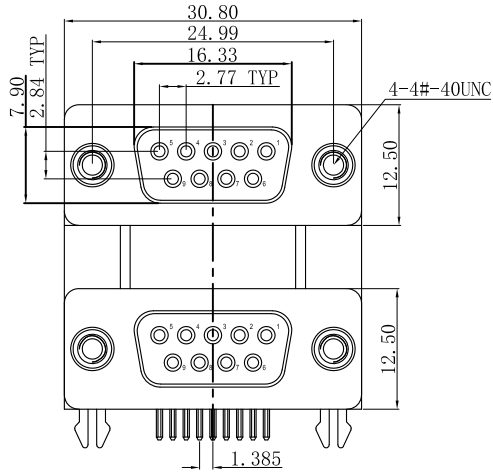

NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING:PBT BLACK UL94V-0
- 1-2.CONTACTS:COPPER ALLOY .
- 1-3.SHELL: SPCC.

2.PLATING SPECIFICATION:

- 2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.

2-2. SHELL:

- Ni 30u" MIN. UNDER PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:

- 3-1.CURRENT RATING:3A
- 3-2.VOLTAGE RATING:250V AC.
- 3-3.CONTACT RESISTANCE: 30mΩ Max.
- 3-4.INSULATION RESISTANCE: 1000MΩ MIN
- 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min

4.ENVIRONMENTAL PERFORMANCE:

- OPERATING TEMPERATURE: -55°C~+105°C.

Specification Type (1: 2)

A	B	C	D	E	F

WLDBF9-18 1 X X X 159

PLATING: TYPE

- 1-G/F
- 2-AU 3U"
- 5-AU 15U"

COLOUR:

- A:Black

- A: Specification Type A
- B: Specification Type B
- C: Specification Type C
- D: Specification Type D
- E: Specification Type E
- F: Specification Type F

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO:	DWG. NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1	Wang_jr	21.03.11	WLDBF9-181XXX159	ENDE05	
			0.0±0.35	X° REF±6°	APPROVED	Ding_Bo	21.03.11	TITLE:			
			UNIT: mm	0.00±0.25	X° ±3°	DESIGNER	Ou_Jian	21.03.11	DOUBLE DR9F-DR9F	REV: A0	
			SIZE: A4	0.000±0.10	X° X'±2°	DRAWN					