

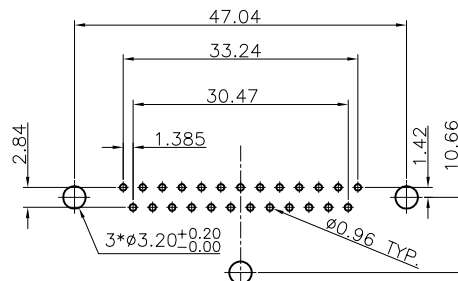


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

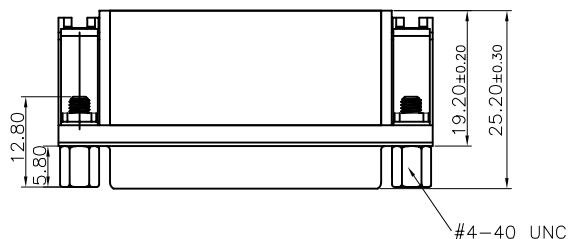

P.C.B. LAYOUT(TOP VIEW)



SCALE: 1:2

NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING: PBT+30%G/F UL94V-0
- 1-2.CAP: PBT+30%G/F UL94V-0
- 1-3.CONTACTS: BRASS C2680R-EH
- 1-3.SHELL: SPCC
- 1-4.BOARD LOCK: SPCC
- 1-5.BOARD LOCK-M: SPCC
- 1-6.SCREW: SPCC

2.PLATING:

- 2-1.CONTACT:
 - GOLD PLATING ON CONTACT AREA,
 - MATTE TIN PLATED ON SOLDER TAILS
 - NICKEL PLATED UNDER OVERALL.
- 2-2.SHELL: NICKEL PLATED OVERALL
- 2-3.BOARD NICKEL PLATING OVER COPPER
- 2-4.SCREW: NICKEL PLATED OVERALL

3.ELECTRICAL PERFORMANCE:

- 3-1.CURRENT RATING: 3A
- 3-2.VOLTAGE RATING: 250V MAX
- 3-3.CONTACT RESISTANCE: 30mΩ Max.
- 3-4.INSULATION RESISTANCE: 1000MΩ MIN
- 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC Min



4.ENVIRONMENTAL PERFORMANCE:

- OPERATING TEMPERATURE: -55°C~+105°C.

5.P/N ORDER:

WLDBF9-25 1 X X 0 119

PLATING: 7-SN COLOUR: H-PURPLE

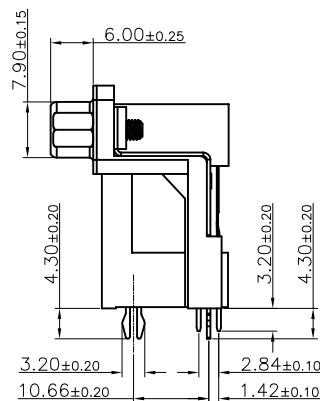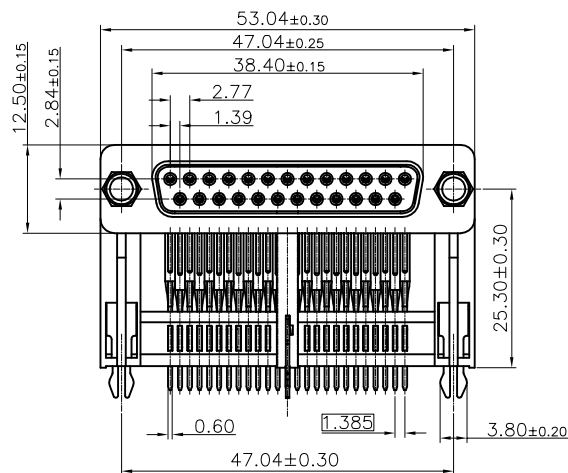

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: WLBDF9-251XX0119	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
				0.0±0.35	X°REF±6°							
				UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	21.01.13	TITLE: DR HIGH 25F 90°DIP		
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.01.13	REV: A0			SHEET: 1/1