
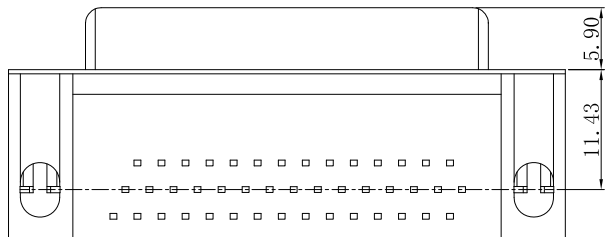




The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

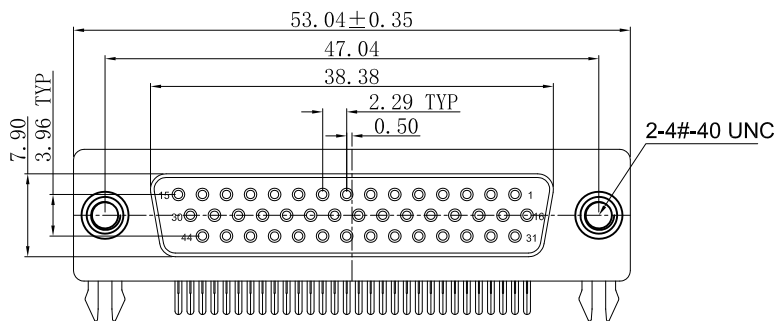

CHARACTERISTICS:


- 1、 RATED VOLTAGE: 250V
- 2、 RATED CURRENT: 3.0AMP
- 3、 CONTACT RESISTANCE: 30mΩ Max.
- 4、 INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- 5、 Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、 Operating temperature: -55℃~105℃
- 7、 INSERTION/EXTRACTION FORCE PER CONTACT: 9.08Kg Max
0.78Kg Min.

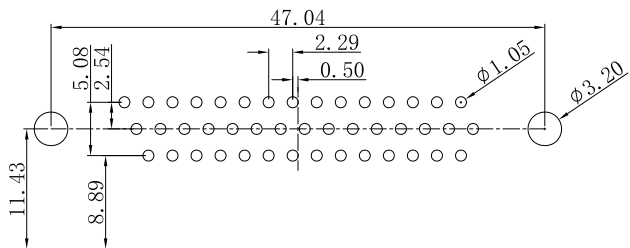

PCB layout

ORDER INFORMTION

P/N:WLDBF9-441XXX063

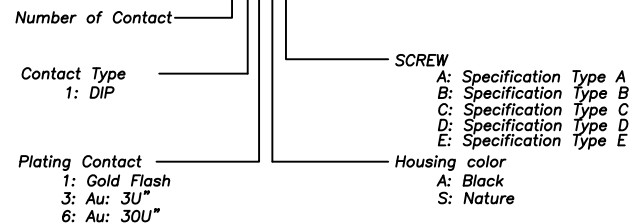

Specification Type (1:2)				
A	B	C	D	E
	4.80	5.80	4.80	5.80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.03.11	WLDBF9-441XXX063	ENDE05	
			UNIT: mm	0.00±0.25	X° ±3°	DESIGNER	Ding_Bo	21.03.11	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	Ou_Jian	21.03.11	HDR 44F 8.89 90° DIP		