
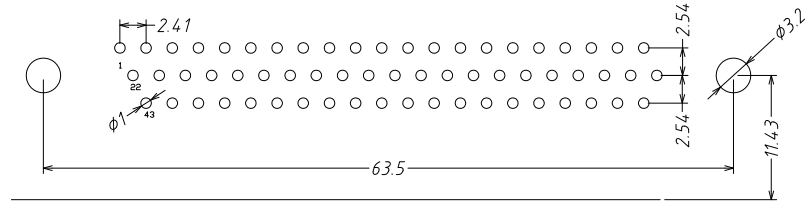



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements


RoHS

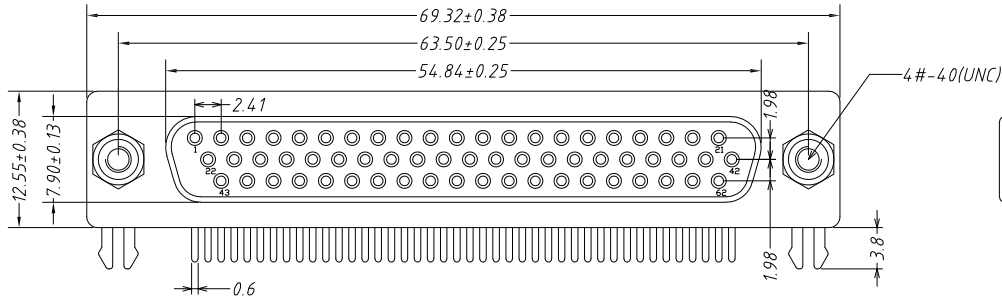

PCB LAYOUT

NOTE:


- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING:PBT FIBER 30% (UL94V-0)
 - 1-2.CONTACTS:BRASS
 - 1-3.SHELL: STEEL
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
 - NI 40U" MIN. UNDER PLATED OVER ALL.
 - AU PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - 2-2. SHELL:
 - NI 30U" MIN. UNDER PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING:1.5A
 - 3-2.VOLTAGE RATING:AC 500V.
 - 3-3.CONTACT RESISTANCE: 30mΩ MAX.
 - 3-4.INSULATION RESISTANCE: 3000MΩ MIN
 - 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC MIN.

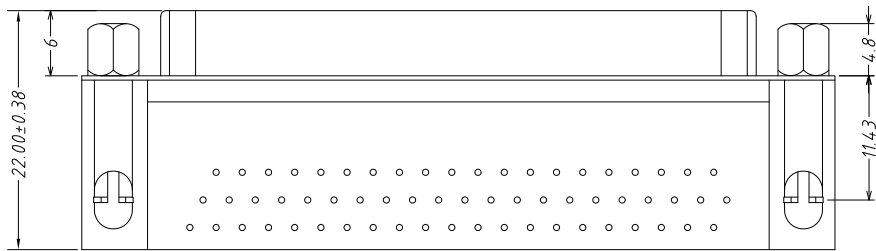

WLDBF9-62 1 X X 0084

PLATING:
 1-G/F
 2-AU 3U"
 5-AU 15U"
 6-AU 30U"

COLOUR:
 A:Black
 K:White

REV.	REVISION RECORD	DATE	☉	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLDBF9-621XX0084	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Ding_bo	21.01.13	TITLE: HDR 62P 8.89 female		REV: A0
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Ou_jian	21.01.13			SHEET: 1/1