

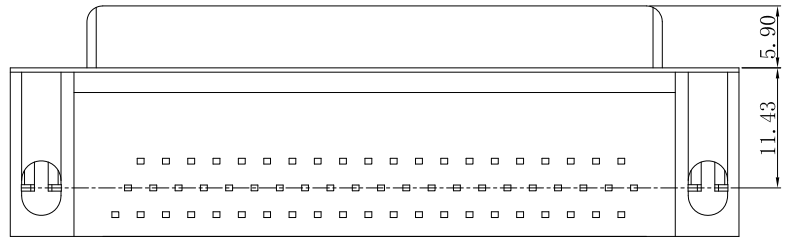



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

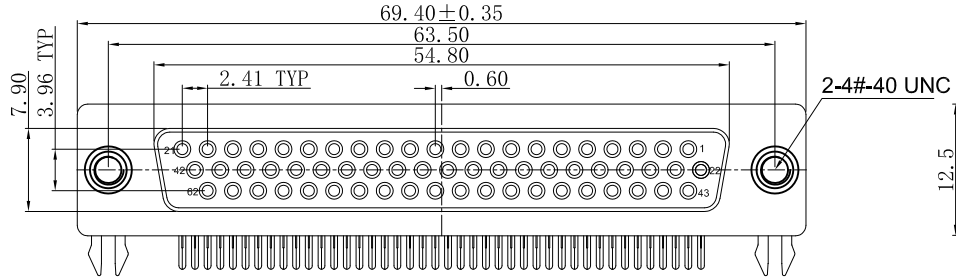

- CHARACTERISTICS:
- 1、 RATED VOLTAGE: 250V
 - 2、 RATED CURRENT: 3.0AMP
 - 3、 CONTACT RESISTANCE: 30mΩ Max.
 - 4、 INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
 - 5、 Electric Pressure: Keeping 60 second in AC 500V/1mA
 - 6、 Operating temperature: -55℃~105℃
 - 7、 INSERTION/EXTRACTION FORCE PER CONTACT: 13.2Kg Max
1.1Kg Min.

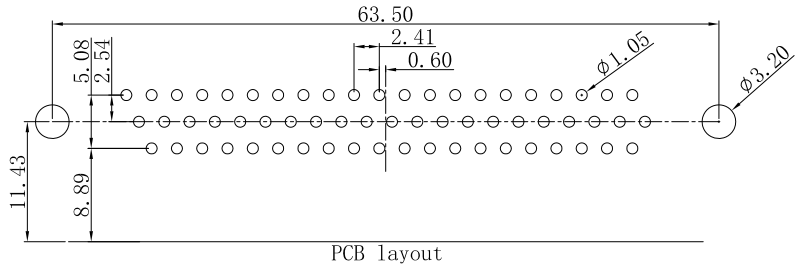

Specification Type (1:2)

A	B	C	D	E

ORDER INFORMTION

P/N: WLDBF9-621XXX065

Number of Contact: _____

Contact Type: _____
1: DIP

Plating Contact: _____
1: Gold Flash
3: Au: 3U"
6: Au: 30U"

SCREW: _____

Housing color: _____
A: Black
S: Nature

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.03.11	WLDBF9-621XXX065	ENDE05	
			UNIT: mm	0.00 ± 0.25	X° ± 3°	DESIGNER	Ding_Bo	21.03.11	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000 ± 0.10	X° X' ± 2°	DRAWN	Ou_Jian	21.03.11	HDR 62F 8.89 90° DIP		