


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

PIN	A	B	C	D
9	30.8	25.0	16.95	19.1
15	39.2	33.3	25.3	27.6
25	53.05	47.04	39	41.15
37	69.4	63.5	55.4	57.4

NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.HOUSING:PBT FIBER 30% (UL94V-0)  
 1-2.CONTACTS:BRASS  
 1-3.SHELL: STAINLESS STEEL.  
 2.PLATING SPECIFICATION:  
 2-1.CONTACTS:  
 NI 40U" MIN. UNDER PLATED OVER ALL.  
 AU PLATED ON THE FUNCTIONAL AREA OF CONTACT.  
 2-2. SHELL:  
 NI 30U" MIN. UNDER PLATED OVER ALL.  
 3.ELECTRICAL PERFORMANCE:  
 3-1.CURRENT RATING:5A  
 3-2.VOLTAGE RATING:AC 300V  
 3-3.CONTACT RESISTANCE: 30mΩ MAX.  
 3-4.INSULATION RESISTANCE: 3000MΩ MIN  
 3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC MIN.  
 4.ENVIRONMENTAL PERFORMANCE:  
 OPERATING TEMPERATURE: -55°C~+105°C.

WLDBM0-XX 4 X X 0081  
 PIN number: 09-09PIN  
 15-15PIN  
 25-25PIN  
 37-37PIN  
 COLOUR:  
 A:Black  
 K:White  
 G:BLUE  
 PLATING:  
 1-G/F  
 2-AU 3U"  
 5-AU 15U"  
 6-AU 30U"

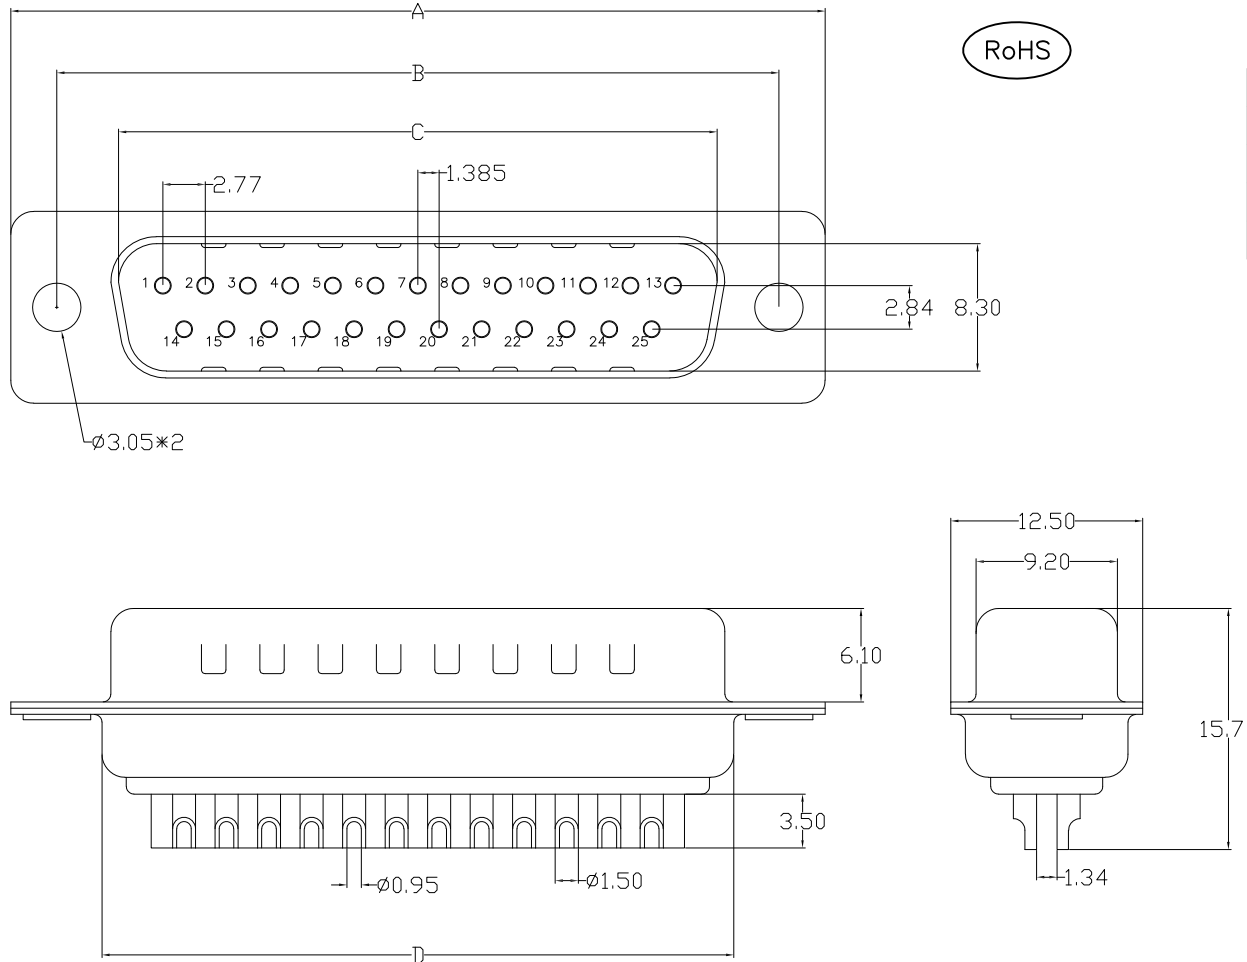

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLDBM0-XX4XX0081	ENDE05	
			UNIT:mm	X'±3'	DESIGNER	Ding_bo	21.01.13	TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	0.00±0.10	X'X' ±2'	DRAWN	Ou_jian	21.01.13	DB male welding BUT		