
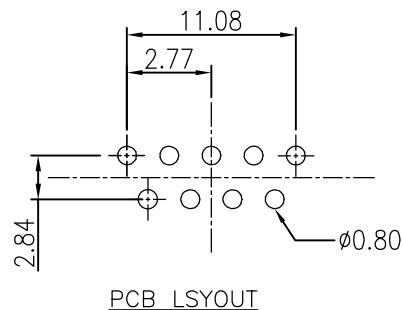


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

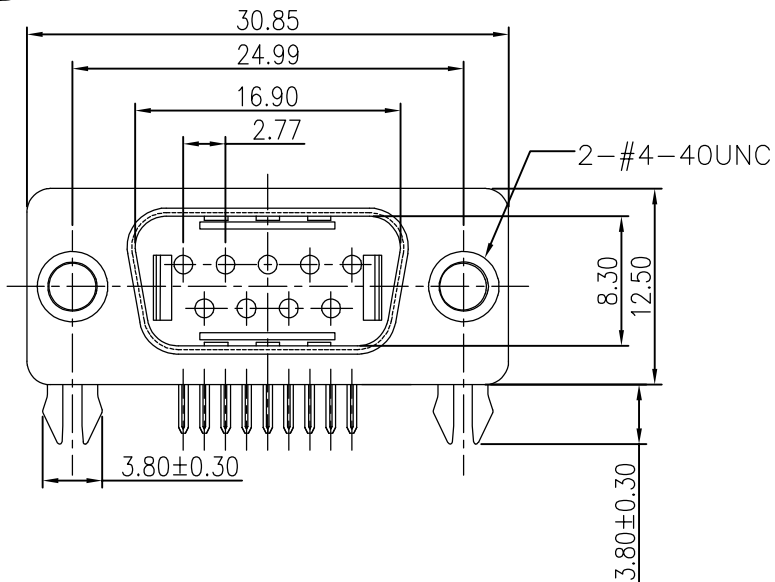

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PBT UL94V-0 BLACK.

1-2.CONTACTS: COPPER ALLOY

1-3.SHELL: SPCC

1-4.RIVET: COPPER ALLOY

2.PLATING:

2-1.CONTACT:

SELECTIVE GOLD PLATED ON CONTACT AREA

80u" Min. TIN PLATED OVERALL

50u" Min. NICKEL UNDER-PLATED

2-2.SHELL: 50u" Min. NICKEL PLATED OVERALL

2-3.HARPOON: TIN PLATED OVERALL

2-4.RIVET: NICKEL PLATED OVERALL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 3A

3-2.VOLTAGE RATING: 250V MAX

3-3.CONTACT RESISTANCE: 25mΩ Max.

3-4.INSULATION RESISTANCE: 5000MΩ MIN

3-5.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC Min

4.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25°C~+85°C.



5.P/N ORDER:


WLDBM9-09 1 X X 0 104

PLATING: 1-G/F

2-AU 3U"

COLOUR: A-BLACK

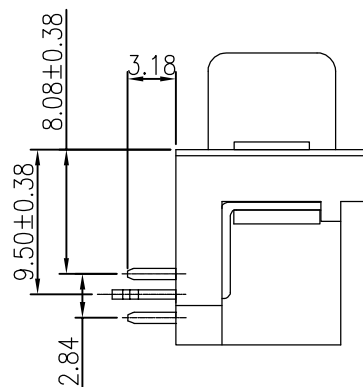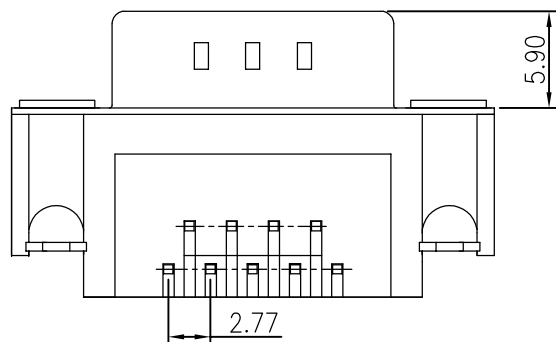

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.01.13		LINEAR	ANGLES	1:1	Wang_jr	21.01.13	WLDBM9-091XX0104	ENDE05	
			0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.01.13	TITLE:			
			0.00±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.01.13	DR8.08 9M 90°DIP			
			SIZE: A4							REV: A0	SHEET: 1/1