

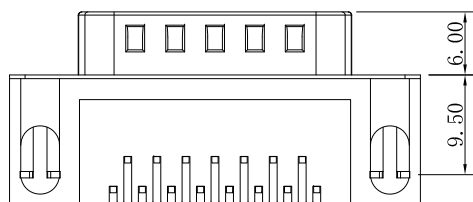


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements



CHARACTERISTICS:


- 1、 RATED VOLTAGE: 250V AC CD
- 2、 RATED CURRENT: 3.0AMP
- 3、 CONTACT RESISTANCE: 30mΩ Max.
- 4、 INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- 5、 Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、 Operating temperature: -55°C~105°C
- 7、 INSERTION/EXTRACTION FORCE PER CONTACT: 5.0Kg Max
0.45Kg Min.

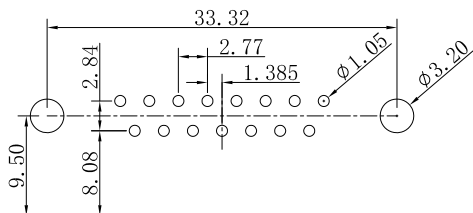

PCB layout

ORDER INFORMATION

P/N: WLDBM9-151XXX038

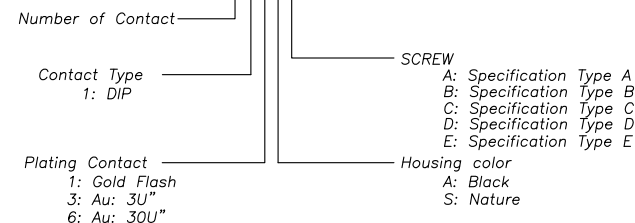

Specification Type (1:2)				
A	B	C	D	E

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 WanLian Teconology Co., Ltd					
A0	NEW RELEASE	21.01.13		<table border="1"> <tr> <td>LINEAR</td> <td>ANGLES</td> </tr> <tr> <td>0.0±0.35</td> <td>X° REF±6°</td> </tr> <tr> <td>0.00±0.25</td> <td>X° ±3°</td> </tr> <tr> <td>0.000±0.10</td> <td>X° X'±2°</td> </tr> </table>	LINEAR	ANGLES	0.0±0.35	X° REF±6°	0.00±0.25	X° ±3°		0.000±0.10	X° X'±2°	APPROVED	Wang_jr	21.03.11
LINEAR	ANGLES															
0.0±0.35	X° REF±6°															
0.00±0.25	X° ±3°															
0.000±0.10	X° X'±2°															
			UNIT: mm		DESIGNER	Ding_Bo	21.03.11	TITLE:	DR 15M 8.08 90° DIP							
			SIZE: A4		DRAWN	Ou_Jian	21.03.11		REV: A0	SHEET: 1/1						