


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING:PBT BLACK UL94V-0
    - CONTACTS:COPPER ALLOY .
    - SHELL: SPCC.
  - PLATING SPECIFICATION:
    - CONTACTS:
      - Ni 50u" MIN. UNDER PLATED OVER ALL.
      - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
    - SHELL:
      - Ni 30u" MIN. UNDER PLATED OVER ALL.
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING:3A
    - VOLTAGE RATING:250V AC.
    - CONTACT RESISTANCE: 30mΩ Max.
    - INSULATION RESISTANCE: 1000MΩ MIN
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -55°C~+105°C.

Specification Type (1: 2)

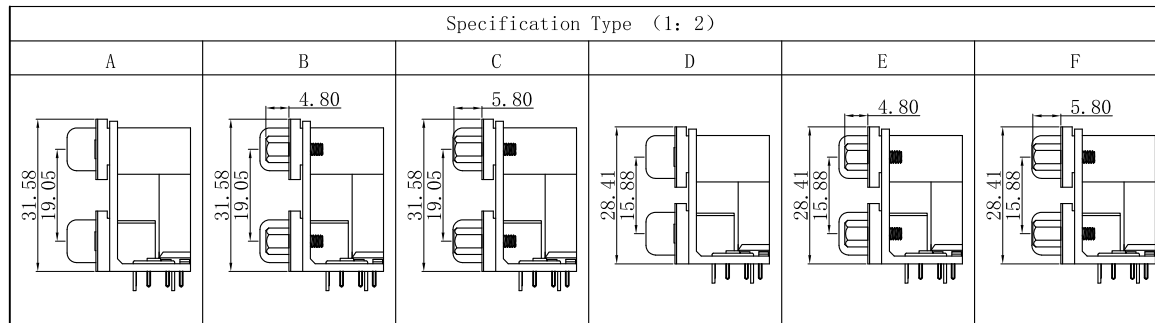

WLDBM9-18 1 X X X 161

PLATING: TYPE  
 1-G/F  
 2-AU 3U"  
 5-AU 15U"

COLOUR:  
 A:Black

A: Specification Type A  
 B: Specification Type B  
 C: Specification Type C  
 D: Specification Type D  
 E: Specification Type E  
 F: Specification Type F

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO:	DWG. NO:	 WanLian Teconology Co., Ltd					
A0	NEW RELEASE	21. 01. 13		1:1						APPROVED	Wang_jr	21. 03. 11	WLDBM9-181XXX161	ENDE05
			LINEAR	0.00±0.35	ANGLES	X° REF±6°	DESIGNER	Ding_Bo		21. 03. 11	TITLE:	DOUBLE DR9M-DR9M	REV: A0	SHEET: 1/1
			UNIT: mm	0.00±0.25	X° ±3°	DRAWN	Ou_Jian	21. 03. 11						
			SIZE: A4	0.000±0.10	X° X'±2°									