

PCB layout

Specification Type (1:2)

A	B	C	D	E
	4.80	5.80	4.80	5.80


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

CHARACTERISTICS:

- 1、RATED VOLTAGE: 250V
- 2、RATED CURRENT: 3.0AMP
- 3、CONTACT RESISTANCE: 30mΩ Max.
- 4、INSULATION RESISTANCE: 1000 MΩ MIN.500V DC
- 5、Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、Operating temperature: -55℃~105℃
- 7、INSERTION/EXTRACTION FORCE PER CONTACT: 5.84Kg Max
0.45Kg Min.

ORDER INFORMATION

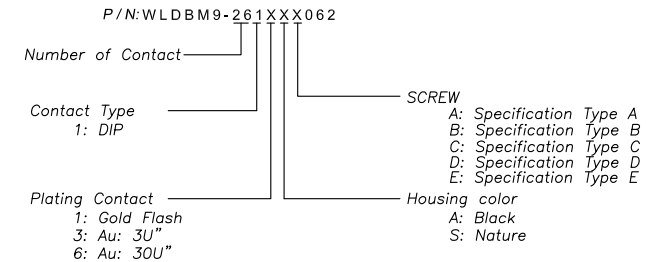

REV.	REVISION RECORD	DATE	UNIT: mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		SIZE: A4	LINEAR	ANGLES	APPROVED	Wang_jr	21.03.11	WLDBM9-261XXX062	
				0.00±0.25	X° ±3°	DESIGNER	Ding_Bo	21.03.11	TITLE: HDR 26M 8.89 90° DIP		REV: A0
				0.000±0.10	X° X'±2°	DRAWN	Ou_Jian	21.03.11			SHEET: 1/1