
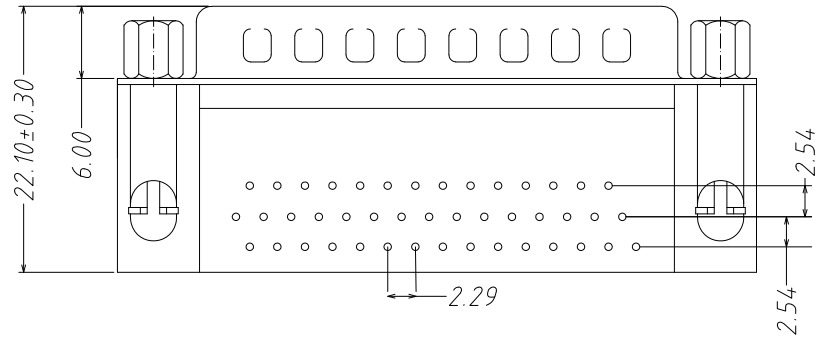
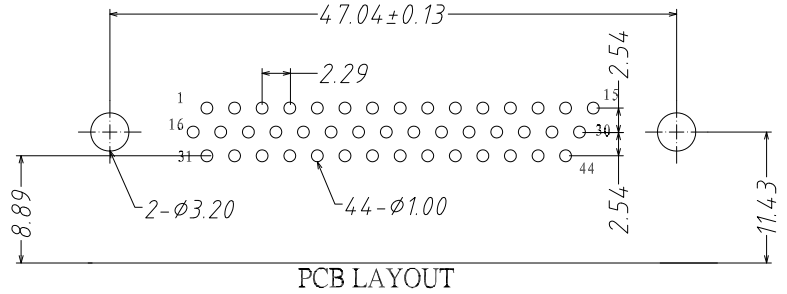



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

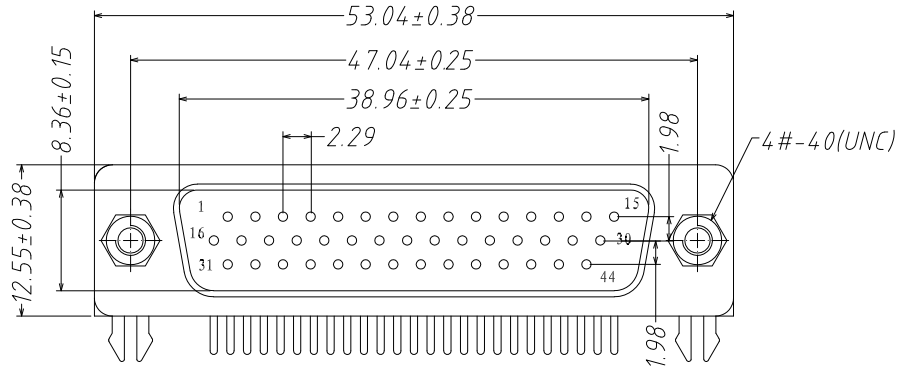

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING:PBT FIBER 30% (UL94V-0)
 - CONTACTS:BRASS
 - SHELL: STAINLESS STEEL
 - BOARD LOCK:SPCC.
 - SCREWS:STAINLESS STEEL
 - PLATING SPECIFICATION:
 - CONTACTS:
 - NI 40U" MIN. UNDER PLATED OVER ALL.
 - AU PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - SHELL:
 - NI 30U" MIN. UNDER PLATED OVER ALL.
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING:1.5A
 - VOLTAGE RATING:AC 500V
 - CONTACT RESISTANCE: 30mΩ MAX.
 - INSULATION RESISTANCE: 3000MΩ MIN
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC MIN.
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -55°C~+105°C.


WLDBM9-44 1 X X 0083

PLATING:

- 1-G/F
- 2-AU 3U"
- 5-AU 15U"
- 6-AU 30U"

 COLOUR:

- A:Black
- K:White
- G:BLUE

| REV. | REVISION RECORD | DATE | UNIT:mm | GENERAL TOLERANCES | | SCALE: | NAME | DATE | PART.NO: | DWG.NO: |  |
|------|-----------------|----------|-----------|--------------------|----------|---------|----------|------------------|-------------------|---------|---|
| AO | NEW RELEASE | 21.01.13 | | LINEAR | ANGLES | 1:1 | | | | | |
| | | | 0.00±0.25 | X'±3' | DESIGNER | Ding_bo | 21.01.13 | WLDBM9-441XX0083 | HDR 44P 8.89 Male | | REV: A0 |
| | | | 0.00±0.10 | X'X' ±2' | DRAWN | Ou_jian | 21.01.13 | | | | SHEET: 1/1 |