

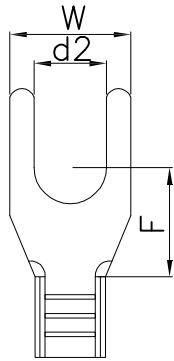



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

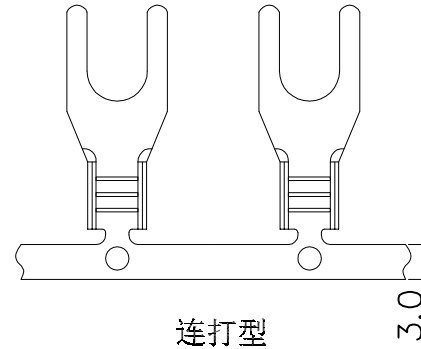

T: 1.0±0.02

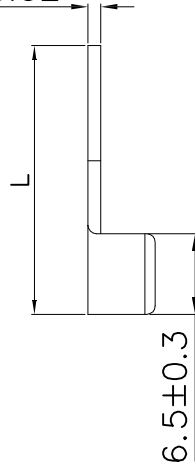

备注:

1. 接压线径: 2.5-4mm<sup>2</sup> (14-12AWG)
2. 端子材质: 紫铜
3. 表面处理: 镀锡

ItemNO. 料号	螺栓规格	mm/inch 主要尺寸			
	Stud Size	d2±0.2	W±0.2	F±0.5	L±1.0
WLLS20-032AC030A02	#4	3.2(.125)	5.7(.224)	7.0(.275)	18.0(.708)
WLLS20-043AC030A03	#8	4.3(.169)	7.3(.287)	7.0(.275)	18.0(.708)
WLLS20-043AC030A04	#8	4.3(.169)	8.0(.314)	7.0(.275)	18.0(.708)
WLLS20-053AC030A02	#10	5.3(.208)	8.0(.314)	7.0(.275)	18.0(.708)
WLLS20-064AC030A02	1/4	6.4(.251)	12.0(.472)	8.0(.314)	21.0(.826)

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 万连科技 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	APPROVED	Wang_jr	21.11.17	WLLS20-XXXAC030AXX		ENDE05
			0.0±0.35	X°REF±6°		DESIGNER	Han_Gao	21.11.17	TITLE:		
			0.00±0.25	X°±3°		DRAWN	Zijun_Huang	21.11.17	无绝缘Y形连续端子SNB3.5 接线2.5-4mm <sup>2</sup> (14-12AWG)		REV: A0
			UNIT:mm	X°X'±2°						SHEET: 1/1	
			SIZE: A4	0.000±0.10							