

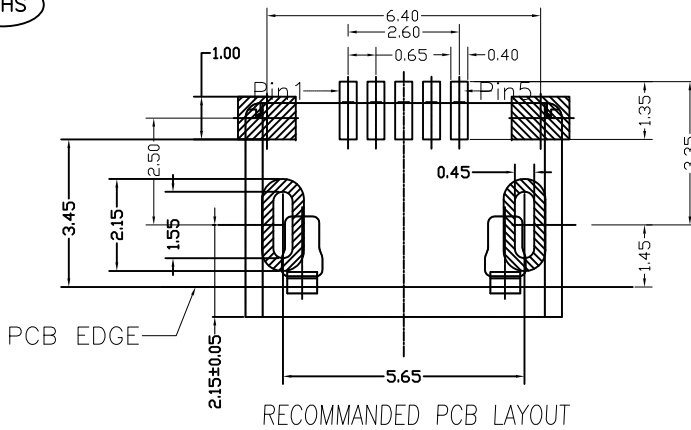
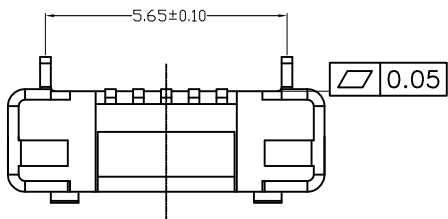
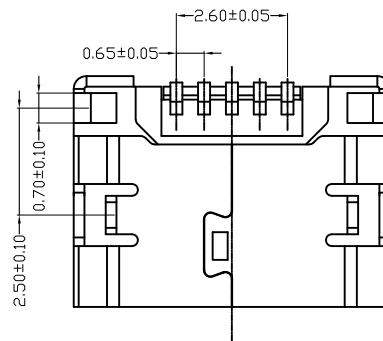



The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

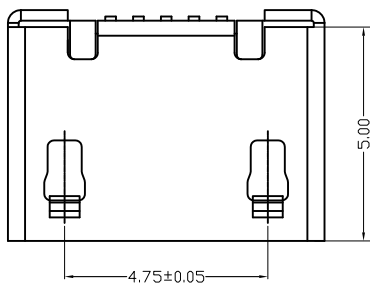


- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING: HIGH TEMPERATURE THERMOPLASTIC WITH G.F, UL94V-0
    - CONTACTS: COPPER ALLOY.
    - SHELL: COPPER ALLOY.
  - PLATING SPECIFICATION:
    - CONTACTS: Ni UNDER PLATED OVER ALL. Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
    - SHELL: TIN PLATED OVER ALL AND Ni UNDER PLATED OVER ALL.
  - MECHANICAL PERFORMANCE:
    - INSERTION FORCE: 3.57kgf MAX
    - REMOVAL FORCE: 0.8kgf MIN
    - DURABILITY: 10000 CYCLES.
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING: 1.0A
    - VOLTAGE RATING: 5V MAX
    - CONTACT RESISTANCE: 50m Ohm MAX.
    - INSULATION RESISTANCE: 100MΩ MIN
    - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -30°C~+80°C.
  - PACKAGE SPEC: TAPE&REEL
  - P/N:



WLM2F9-05 2 X X 0 082

- PLATED: 1.G/F  
2.AU 3U"  
3.AU 5U"  
4.AU 10U"  
9.NI
- COLOUR:  
A.BLACK  
K.WHITE  
G.BLUE

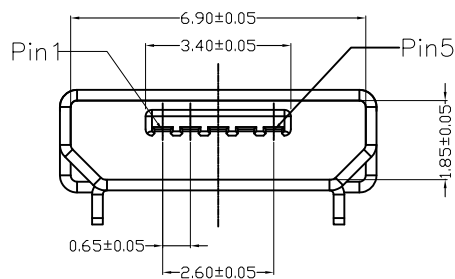

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART NO: WLM2F9-052XX0082	DWG NO: ENDE05	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17			
			0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: MICRO 5P/F B TYPE前插后贴 无卷边无柱			
			UNIT:mm	0.00±0.25	X°±3°	DRAWN	Zijun_Huang		21.11.17		
			SIZE: A4	0.000±0.10	X°X'±2°				REV: A0	SHEET: 1/1	