

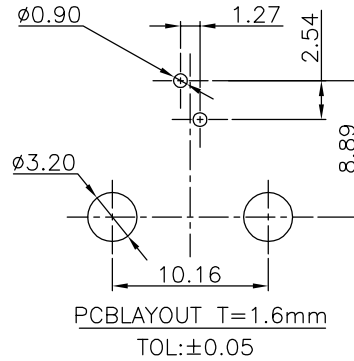



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

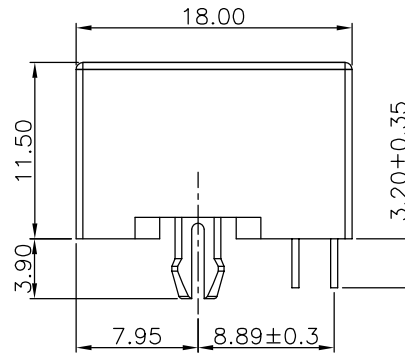

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT UL94V-0
 - 1-2.CONTACT: PHOSPHOR BRONZE $\phi 0.46\text{mm}$
- 2.PLATING SPECIFICATION:
 - G/F PLATING OVER Ni
- 3.MECHANICAL PERFORMANCE:
 - 3-1.INSERTION FORCE: 22N MAX
 - 3-2.REMOVAL FORCE: 22N MAX
 - 3-2.DURABILITY: 750 CYCLES MIN.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING:1.5A
 - 4-2.VOLTAGE RATING:125V MAX
 - 4-3.CONTACT RESISTANCE: 40m Ω Max.
 - 4-4.INSULATION RESISTANCE: 500M Ω MIN
 - 4-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min
- 5.ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+85°C.
- 6.PACKAGE SPEC:TRAY

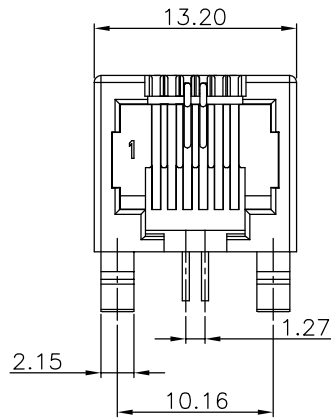

P/N:

WLR1F9-02 1 X X X 011

PLATING:


- 1-G/F
- 3-Au 6u"
- 5-Au 15u"
- 6-Au 30u"

HOUSING:

- 1-PBT
- 2-LCP
- 3-PA9T

COLOUR:

- A-BLACK
- J-GRAY



REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.01.13		SIZE: A4	LINEAR 0.0±0.35	ANGLES X°REF±6°	APPROVED	Wang_jr	21.01.13	WLR1F9-021XX011	
				0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.01.13	TITLE: RJ11 6P2C DIP		REV: A0
				0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.01.13			SHEET: 1/1