


RoHS

The product using material and processing must conform to the WL-PZ-001HSF technical standard control requirements

- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING: PA9T UL94V-0, BLACK
    - SHELL: 0.20mm SUS
    - CONTACT: PHOSPHOR BRONZE T=0.25mm
  - PLATING SPECIFICATION:
    - GOLD 1U" PLATING ON CONTACT AREA
    - 50U" MIN NICKEL UNDERPLATING
    - 60U" MIN TIN ON SOLDER TAIL NICKEL
    - 2-1-SHELL:
      - 30u" Ni PLATING OVER ALL MIN.
  - MECHANICAL PERFORMANCE:
    - INSERTION FORCE: 22N MAX
    - REMOVAL FORCE: 22N MAX
    - DURABILITY: 750 CYCLES MIN.
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING: 1.5A
    - VOLTAGE RATING: 125V MAX
    - CONTACT RESISTANCE: 40mΩ Max.
    - INSULATION RESISTANCE: 500MΩ MIN
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -40°C~+85°C
  - PACKAGE SPEC: TRAY

- P/N:
- WLR4F9-08 8 X X X 018
- PLATING:
- 1-G/F
  - 2-Au 3u"
  - 3-Au 6u"
  - 5-Au 15u"
  - 6-Au 30u"
- HOUSING:
- 1-PBT
  - 2-LCP
  - 3-PA9T
- COLOUR:
- A-BLACK

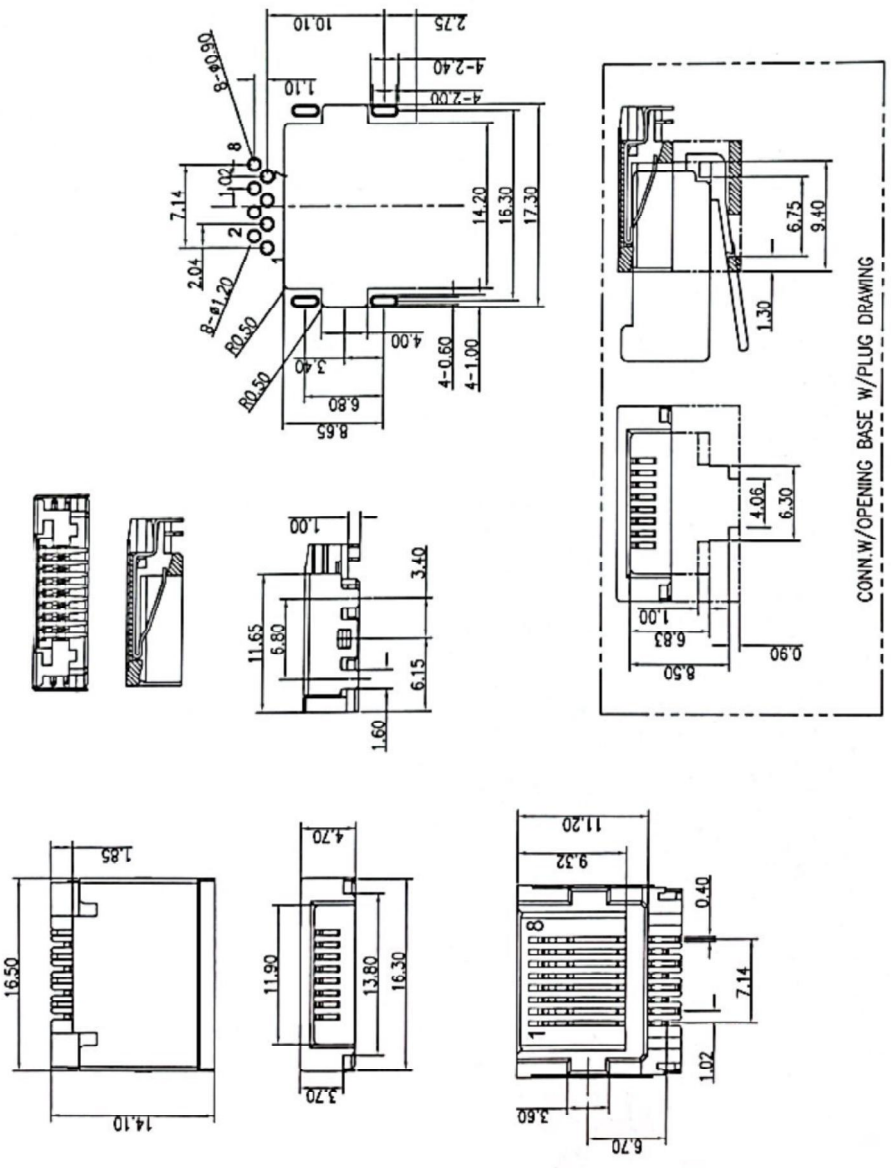

CONN.W/OPENING BASE W/PLUG DRAWING

PIN/序	1	2	3	4	5	6	7	8
说明	TX+	TX-	RX+	RX-				
REV.	REVISION RECORD		DATE					
A1	NEW RELEASE		22.08.23					
A2	SHELL Ni Plating 50u" change 30u"		2022.10.31					
	UNIT: mm							
	SIZE: A4							

GENERAL TOLERANCES		SCALE:
LINEAR	0.0±0.35	1:1
ANGLES	X°REF±6'	
	X°±3'	
	X'X' ±2'	

NAME	DATE
李金川	2022/10/21
马学博	2022/10/13
侯金鑫	2022/10/13

PART NO:	WLR4F9-088XXX018
TITLE:	RJ45 8P8C DIP壳底座式3.7MM

DWG NO: ENDE05

REV: A2 SHEET: 1/1