

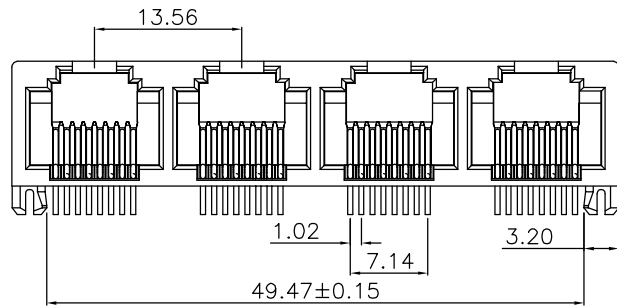
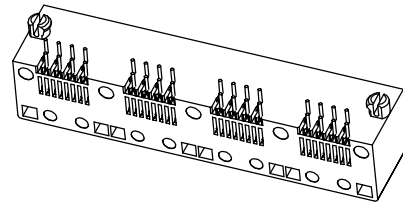


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


RoHS

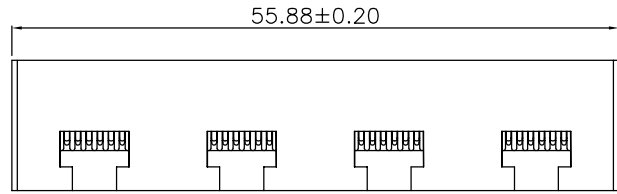

- NOTE:
- MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT UL94V-0,YELLOW
 - 1-2.CONTACT: PHOSPHOR BRONZE $\phi 0.46\text{mm}$
 - PLATING SPECIFICATION:
 - G/F PLATING OVER Ni
 - MECHANICAL PERFORMANCE:
 - 3-1.INSERTION FORCE: 22N MAX
 - 3-2.REMOVAL FORCE: 22N MAX
 - 3-2.DURABILITY: 750 CYCLES MIN.
 - ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING:1.5A
 - 4-2.VOLTAGE RATING:125V MAX
 - 4-3.CONTACT RESISTANCE: 40m Ω Max.
 - 4-4.INSULATION RESISTANCE: 500M Ω MIN
 - 4-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC Min
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
 - PACKAGE SPEC:TRAY

P/N:
WLR4F9-32 1 X X X 015

| | |
|-----------|----------|
| PLATING: | HOUSING: |
| 1-G/F | 1-PBT |
| 2-Au 3u" | 2-LCP |
| 3-Au 6u" | 3-PA9T |
| 5-Au 15u" | 4-PA46 |
| 6-Au 30u" | COLOUR: |
| | A-BLACK |
| | D-ORANGE |
| | E-YELLOW |
| | J-GRAY |

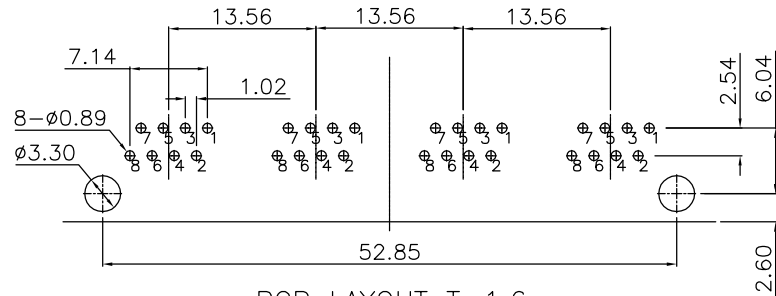

PCB LAYOUT T=1.6
TOP VIEW TOL:±0.05

| REV. | REVISION RECORD | DATE | UNIT:mm | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | PART.NO: | DWG.NO: |  WanLian Teconology Co., Ltd |
|------|-----------------|----------|-----------|--------------------|----------|---------------|----------|-----------------------------|-----------------|---------|--|
| A0 | NEW RELEASE | 21.01.13 | | LINEAR | ANGLES | APPROVED | Wang_jr | 21.01.13 | WLR4F9-321XX015 | ENDE05 | |
| | | | 0.00±0.25 | X°±3° | DESIGNER | Han_Gao | 21.01.13 | TITLE: RJ45 8P8C DIP 1X4 | | | REV: A0 |
| | | | 0.00±0.10 | X°X' ±2° | DRAWN | Zijun_Huang | 21.01.13 | | | | |