

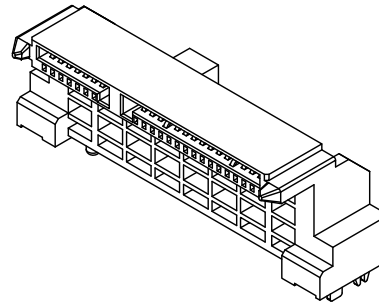
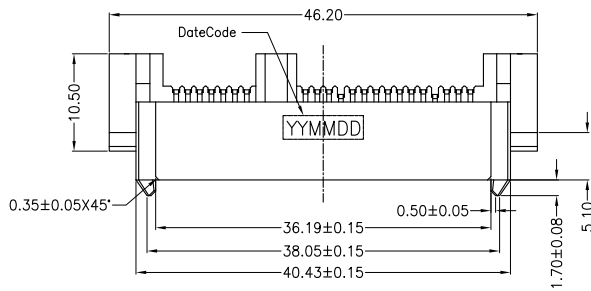
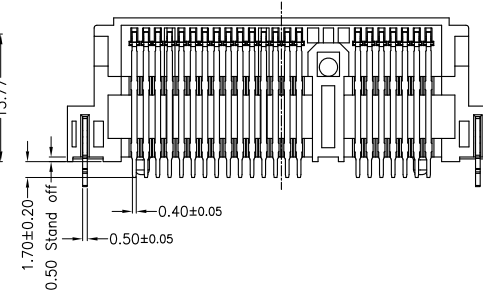


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements




- NOTES:
- MATERIAL AND PLATING:  
HOUSING: LCP+30%G.F,UL94V-0, BLACK  
CONTACT: PHOSPHOR BRONZE,  
GOLD PLATING ON CONTACT AREA,  
100u"MATTE TIN PLATED ON SOLDER TAIL AREA.  
90u" NICKEL UNDERPLATED OVERALL  
FORK: BRASS,  
100u" TIN PLATED ON SOLDER TAILS  
50u" NICKEL UNDERPLATED OVERALL
  - MECHANICAL CHARACTERISTIC  
MATING FORCE: 20N(2.05KGF) MAX.  
UNMATING FORCE: 4N(0.41KGF) MIN.  
DURABILITY: 500 CYCLES.
  - ELECTRICAL CHARACTERISTIC  
CURRENT RATING: 1.5A.  
VOLTAGE RATING: 30V AC.  
CONTACT RESISTANCE: 30M OHM MAX.  
INSULATION RESISTANCE: 1000M OHM MIN  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN
  - TEMPERATURE  
OPERATING TEMPERATURE: -40°C~+85°C  
STORAGE TEMPERATURE: -60°C~+105°C
  - PACKAGE SPEC: TRAY


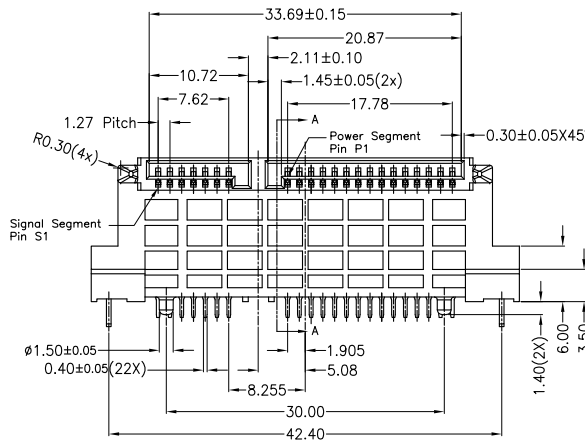


WLSAF9-22 1 X X 0001

PLATING: Colour:  
1-G/F A:Black  
5-AU 15U"  
6-AU 30U"

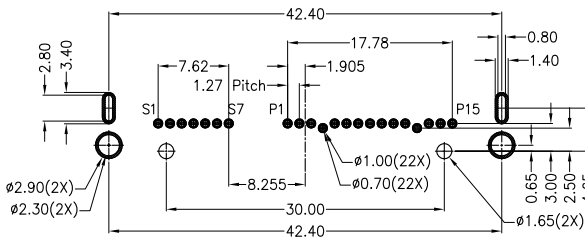

RECOMMENDED PCB LAYOUT (TOP VIEW)  
GENERAL TOLERANCES: ±0.05 (t=1.6)



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLSAF9-221XX0001	ENDE05	
			UNIT: mm	0.00±0.25	X°REF±6°	DESIGNER	Ding_bo	21.01.13	TITLE:		
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Ou_jian	21.01.13	SATA 7+15P/F 插板 加高 有柱	REV: A0	SHEET: 1/1