
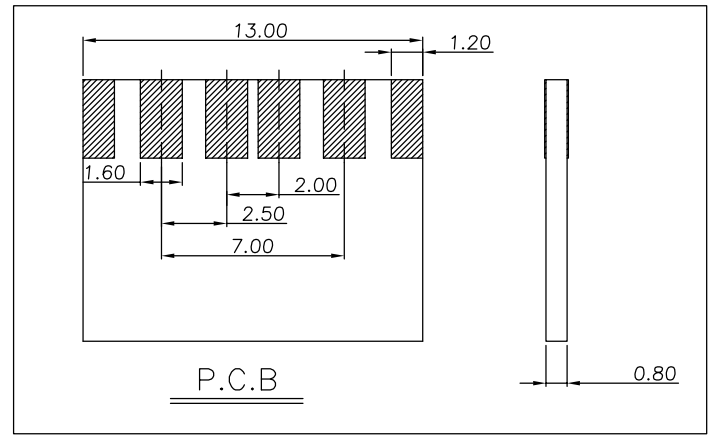
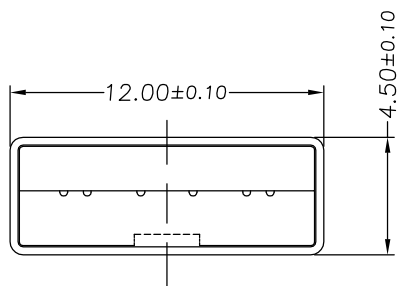
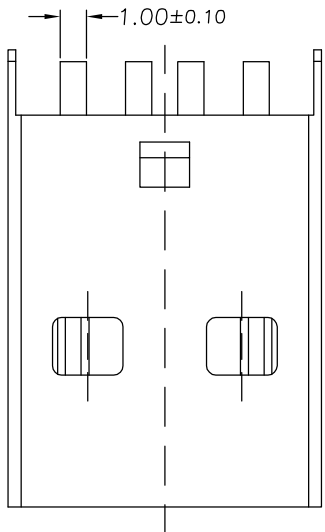
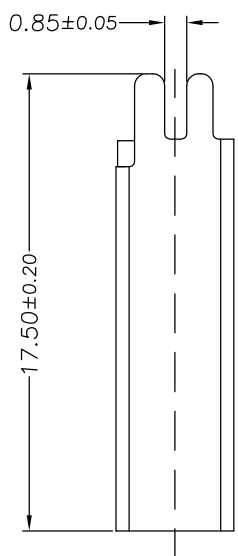


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

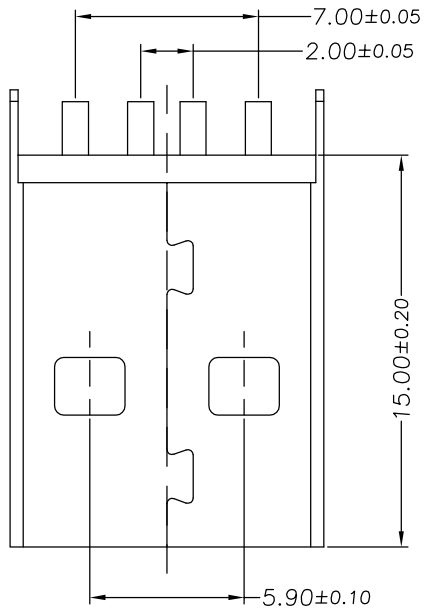

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING:LCP UL94V-0
 1-2.CONTACTS:COPPER ALLOY.
 1-3.SHELL: STAINLESS STEEL.
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 NICKEL ALL OVER
 GOLD FLASH IN CONTACT
 TIN IN SOLDER AREA.
 2-2. SHELL:
 Ni UNDER PLATED OVER ALL.
 3.MECHANICAL PERFORMANCE:
 3-1.INSERTION FORCE: 3.57kgf MAX
 3-2.REMOVAL FORCE: 1.0kgf MIN
 3-3.DURABILITY: 5000 CYCLES.
 4.ELECTRICAL PERFORMANCE:
 4-1.CURRENT RATING:1.5A
 4-2.VOLTAGE RATING:5V MAX
 4-3.CONTACT RESISTANCE: 30m Ohm MAX.
 4-4.INSULATION RESISTANCE: 1000MΩ MIN
 4-5.DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN.
 5.ENVIRONMENTAL PERFORMANCE:
 OPERATING TEMPERATURE: -30°C~+85°C.
 6.PACKAGE SPEC: BAG

PART NO.:
 WLU2M0-04 5 X X 0 181

PLATING: 1-G/F
 2-Au 3u"
 5-Au 15u"
 6-Au 30u"
 COLOUR: A-BLACK
 K-WHITE
 J-GRAY

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13	WLU2M0-045XX0181	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.01.13	TITLE: USB2.0 AM夹板式0.8mm L=17.5mm		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.01.13			