


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

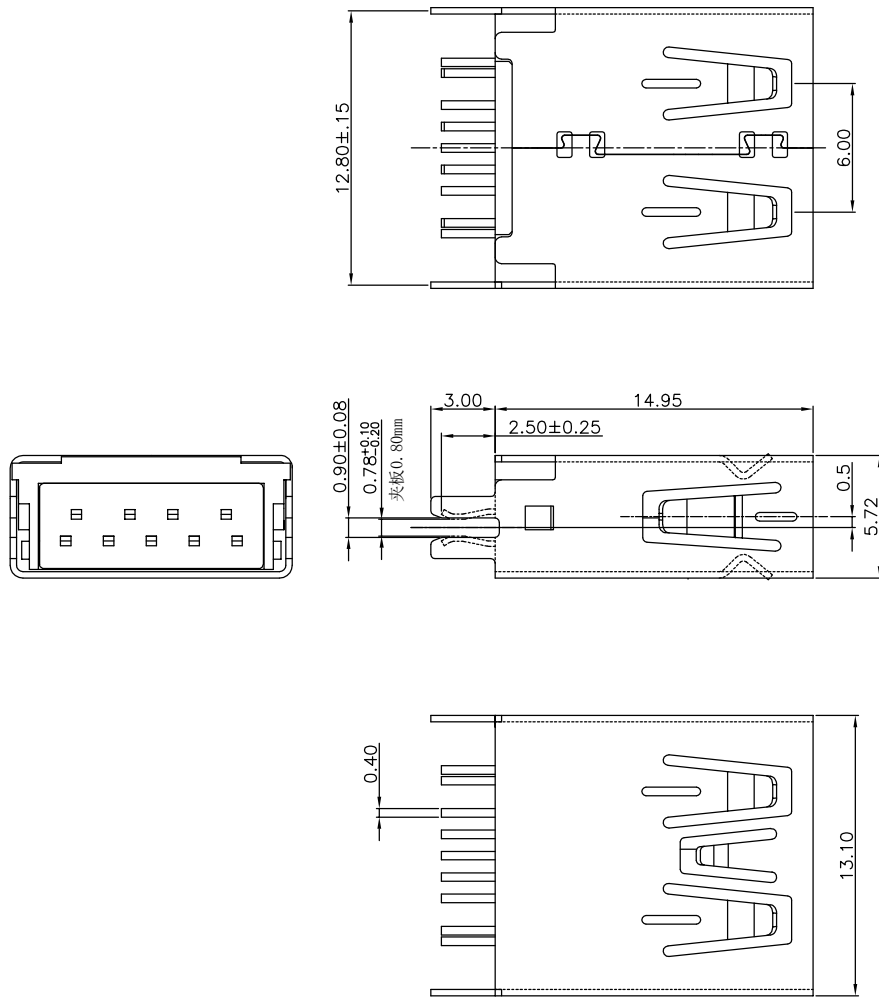

NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: PBT UL94V-0 BLUE OR BLACK
 - CONTACTS: COPPER ALLOY(T=0.25mm)
 - SHELL: SPCC OR COPPER ALLOY
- PLATING SPECIFICATION:
 - CONTACTS: AU PLATED ON CONTACT AREA
TIN PLATED ON SOLDER AREA
NICKEL UNDERPLATING OVER ALL
 - SHELL: Ni UNDER PLATED OVER ALL.
- MECHANICAL PERFORMANCE:
 - INSERTION FORCE: 3.57kgf MAX
 - REMOVAL FORCE: 1.02kgf MIN
- ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 1.5A
 - VOLTAGE RATING: 30V MAX
 - CONTACT RESISTANCE: 30m Ohm MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN.
- ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -40°C~+85°C.
PACKAGE SPEC: TRAY

PRAT.NO.:

WLU3F0-095 X X X 198

PLATING:

- G/F
- Au 3u"
- Au 15u"
- AU 30U"

SHELL:

- SPCC
- COPPER ALLOY

HOUSING COLOUR:

- BLACK
- BLUE

PIN	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SIGNAL NAME	VBUS	D-	D+	GND	StdA_SSRX-	StdA_SSRX+	GND_DRAIN	StdA_SSTX-	StdA_SSTX+

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	1:1	Wang_jr	21.01.13	WLU3F0-095XXX198	ENDE05
			0.0±0.35	X°REF±6°	APPROVED	Han_Gao	21.01.13	TITLE: USB3.0 A/F V/T L=15.0mm	REV: A0
			0.00±0.25	X°±3°	DESIGNER	Zijun_Huang	21.01.13		
			0.000±0.10	X°X' ±2°	DRAWN				



REV: A0 SHEET: 1/1