

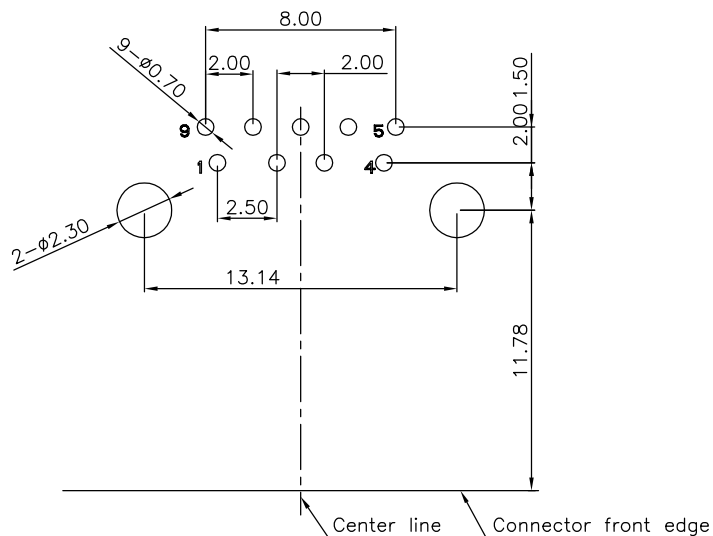
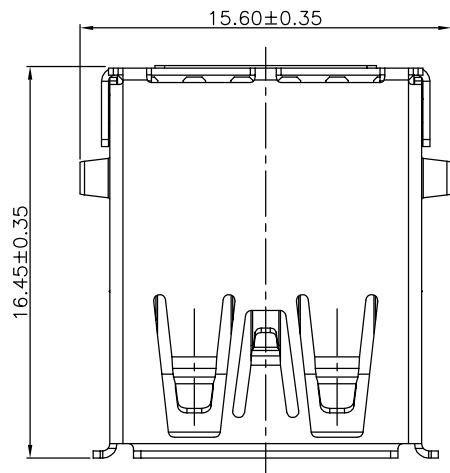


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

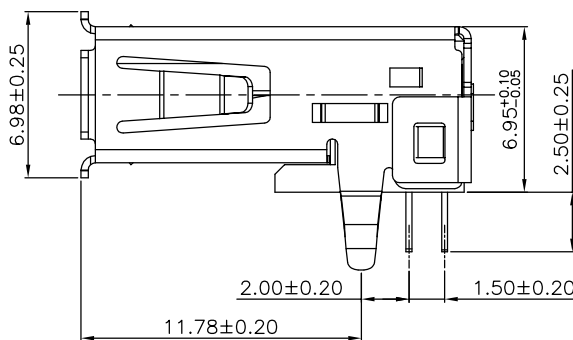

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING:PBT UL94V-0 BLUE
 - CONTACTS:COPPER ALLOY(T=0.25mm)
 - SHELL: METAL
 - PLATING SPECIFICATION:
 - CONTACTS:
AU PLATED ON CONTACT AREA
TIN PLATED ON SOLDER AREA
NICKEL UNDERPLATING OVER ALL
 - SHELL:
Ni UNDER PLATED OVER ALL.
 - MECHANICAL PERFORMANCE:
 - INSERTION FORCE: 3.57kgf MAX
 - REMOVAL FORCE: 1.02kgf MIN
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING:1.5A
 - VOLTAGE RATING:30V MAX
 - CONTACT RESISTANCE: 30m Ohm MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN.
 - ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+85°C.
PACKAGE SPEC: TRAY

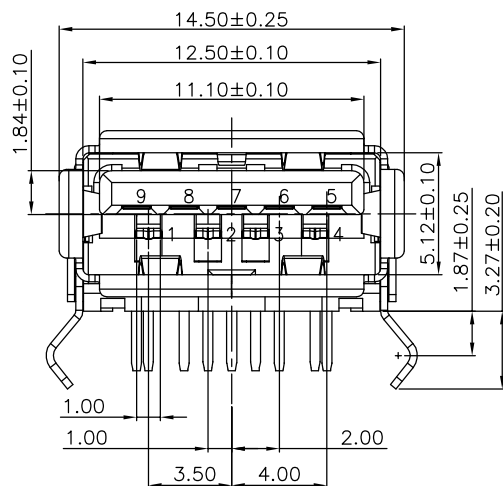

PRAT.NO.:
WLU3F9-091 X X X 199

PLATING: 1-G/F
2-Au 3u"
5-Au 15u"
6-Au 30u"

SHELL: 1-SPCC
2-COPPER ALLOY
3-SUS

HOUSING COLOUR:
A-BLACK
G-BLUE

PIN	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SIGNAL NAME	VBUS	D-	D+	GND	StdA_SSRX-	StdA_SSRX+	GND_DRAIN	StdA_SSTX-	StdA_SSTX+

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	1:1	APPROVED	Wang_jr	21.01.13	WLU3F9-091XXX199	
			0.0±0.35	X°REF±6°		DESIGNER	Han_Gao	21.01.13	TITLE: USB3.0 A/F Right Angle Type DIP	
			0.00±0.25	X°±3°		DRAWN	Zijun_Huang	21.01.13		
			UNIT:mm	0.00±0.25						
			SIZE: A4	0.00±0.10						