
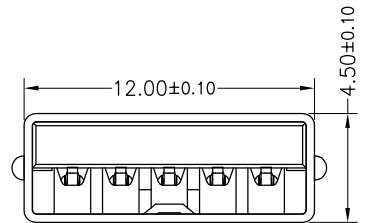
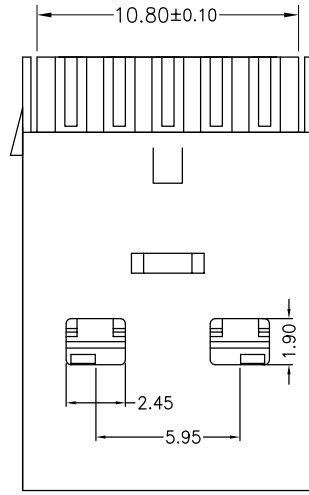
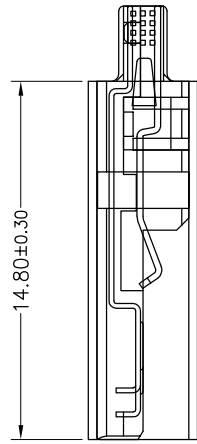
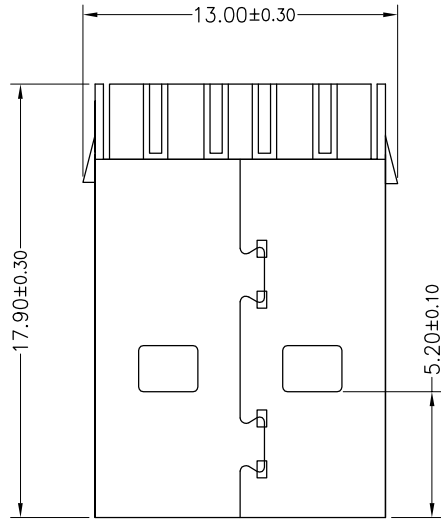


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS



NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING:PBT/LCP UL94V-0
- 1-2.CONTACTS:COPPER ALLOY
- 1-3.SHELL: SPCC

2.PLATING SPECIFICATION:

- 2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
- 2-2. SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.

3.MECHANICAL PERFORMANCE:

- 3-1.INSERTION FORCE: 3.57kgf MAX
- 3-2.REMOVAL FORCE: 1.02kgf MIN
- 3-3.DURABILITY: 1500 CYCLES.

4.ELECTRICAL PERFORMANCE:

- 4-1.CURRENT RATING:1.5A
- 4-2.VOLTAGE RATING:30V MAX
- 4-3.CONTACT RESISTANCE: 30m Ohm MAX.
- 4-4.INSULATION RESISTANCE: 1000MΩ MIN
- 4-5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.

5.ENVIRONMENTAL PERFORMANCE:


- OPERATING TEMPERATURE: -20°C~+85°C.
- PACKAGE SPEC: BAG

PART NO.:

WLU3M0-09 4 X X X 063

PLATING: 1-G/F
2-Au 3u"
5-Au 15u"
6-Au 30u"
HOUSING: 1-PBT
2-LCP
COLOUR: G-BLUE

PIN	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SIGNAL NAME	VBUS	D-	D+	GND	StdA_SSRX-	StdA_SSRX+	GND_DRAIN	StdA_SSTX-	StdA_SSTX+

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13	LINEAR	ANGLES	1:1	Wang_jr	21.01.13	WLU3M0-094XXX063	ENDE05
			0.0±0.35	X°REF±6°	APPROVED	Ding_bo	21.01.13	TITLE:	 WanLian Teconology Co., Ltd
			0.00±0.25	X'±3°	DESIGNER	Ou_jian	21.01.13	USB3.0 A TYPE PLUG L=17.9	
			0.000±0.10	X*X'±2°	DRAWN			REV: A0 SHEET: 1/1	