

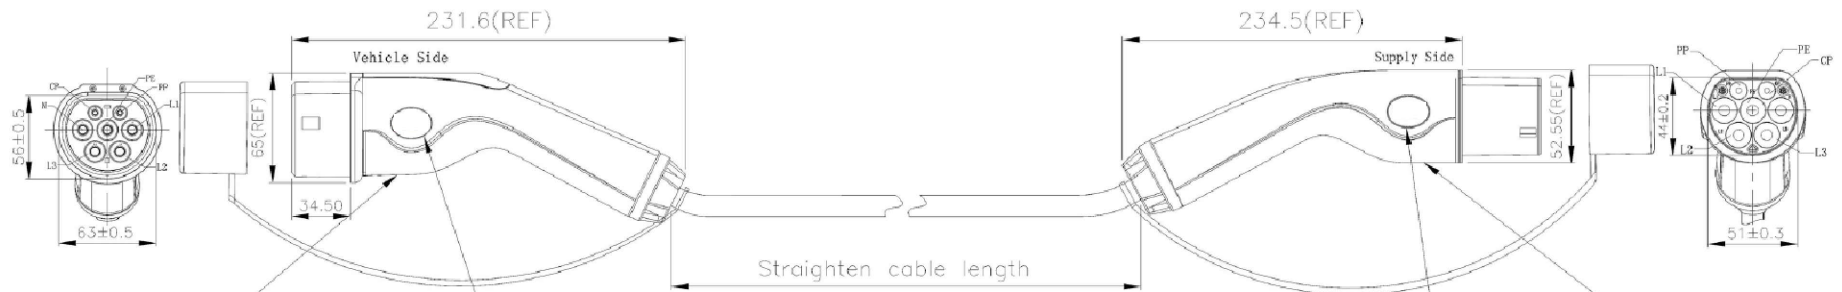
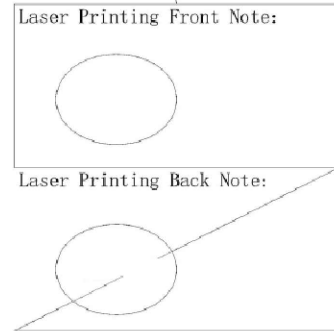


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

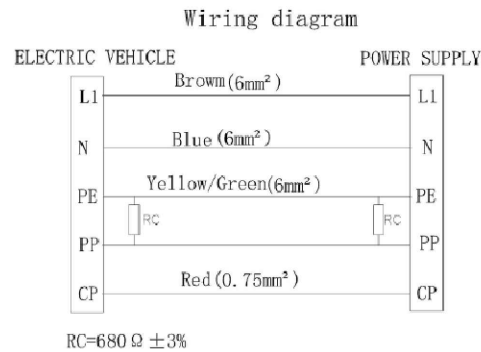


Laser Printing Note:
32A 250V AC
IEC 62196-2:2017
IP54
20XXXXXX-XXXX

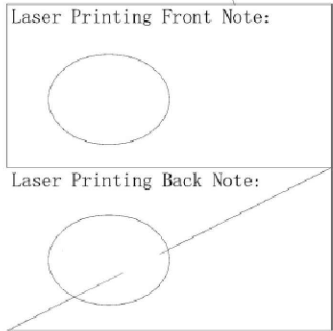

Laser Printing Note:
32A 250V AC
IEC 62196-2:2017
IP54

Technical parameters	
Rated voltage	480V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>500MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min
	L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196. 1-2014, IEC 62196. 2-2016

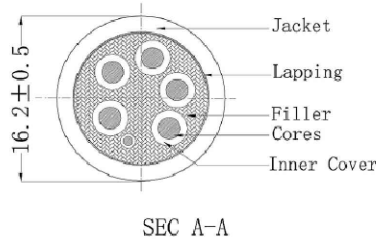

NOTES:
1. Cable: EN50620-2017, IEC62893. 3 EV 5*6+1*0.75mm² Black
2. RoHS Compliance

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
AO	NEW RELEASE	21.10.12	LINEAR 0.0±0.35 0.00±0.25 0.000±0.10	1:1	Wang_jr	21.10.12	YWAC-T-S32A-H5	ENDE05		
			ANGLES X'REF±6° X'±3°	APPROVED	Han_Gao	21.10.12				
			X'X' ±2°	DESIGNER	LongCan_Liu	21.10.12				
							TITLE:		REV: AO	SHEET: 1/1
							EV ELECTRIC VEHICLE AND EV POWER SUPPLY(32A THREE PHASE)			