


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

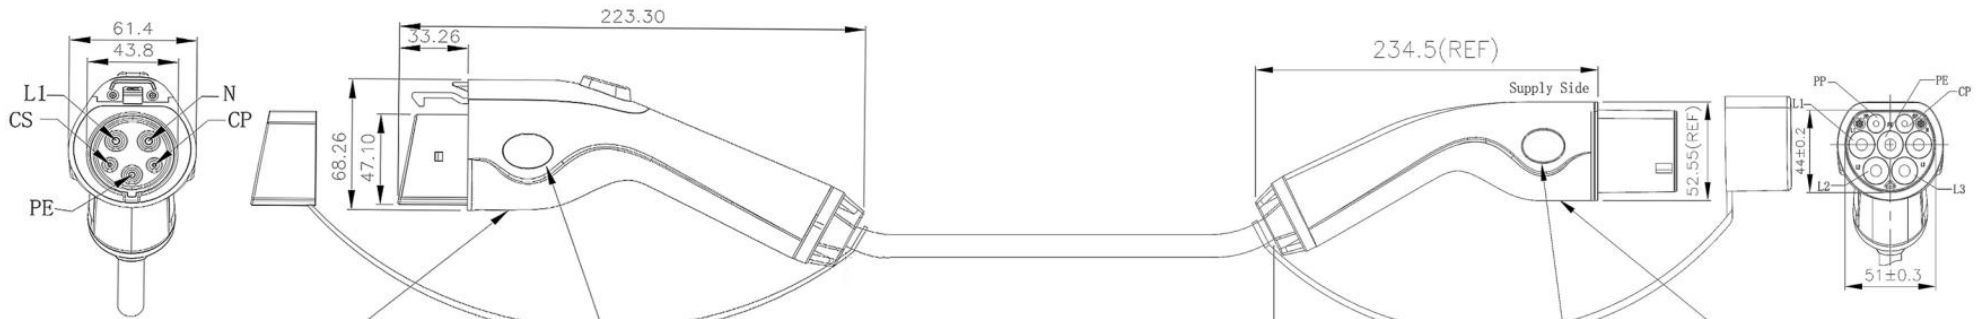



**Laser Printing Note:**  
 32A 250V AC  
 IEC 62196-2:2016  
 IP54  
 20XXXXXX-XXXX

**Laser Printing Front Note:**

**Laser Printing Front Note:**

**Laser Printing Note:**  
 32A 250V AC  
 IEC 62196-2:2017  
 IP54

Technical parameters	
Rated voltage	250V AC
Rated current	16A
Temperature range	-30°C~+50°C
Insulate resistance	>500MΩ, 500V DC 1Min
Withstanding voltage	L、N AND PE,2500V AC 1Min
	L AND N,2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196. 1-2014, IEC 62196. 2-2016

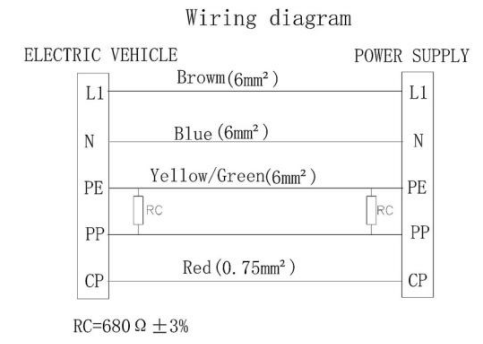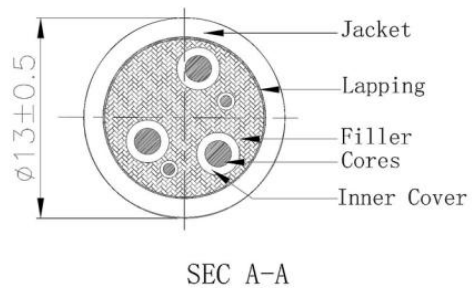

NOTES:  
 1. Cable: EN50620-2017, IEC62893.3 EV 3\*6+1\*0.75mm<sup>2</sup> Black  
 2. RoHS Compliance

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd	
AO	NEW RELEASE	21.10.12	LINEAR	ANGLES	1:1	Wang_jr	21.10.12	WL2-YWCC-S-U32AAP-L5-198	ENDE05		
			0.0±0.35	X°REF±6°	APPROVED						
			0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.12	TITLE: EV ELECTRIC VEHICLE AND EV POWER SUPPLY(32A THREE PHASE)			
			UNIT:mm	X°X' ±2°	DRAWN	LongCan_Liu	21.10.12			REV: AO	SHEET: 1/1