


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

技术参数

连接方式:	螺纹连接
接线方式:	螺钉压接
污染等级:	3
温度范围:	-25℃ ~ +80℃
防护等级:	IP67
插拔周期:	≥500
线规:	0.14~0.25mm ²
电缆直径:	3.5~5.6 MM

芯数	3	4	5 B	6
图形				
额定电流(A)	3	3	3	1
额定电压(V)	60	30	30	30
绝缘电阻(MΩ)	≥100	≥100	≥100	≥100
接触电阻(mΩ)	≤5	≤5	≤5	≤5

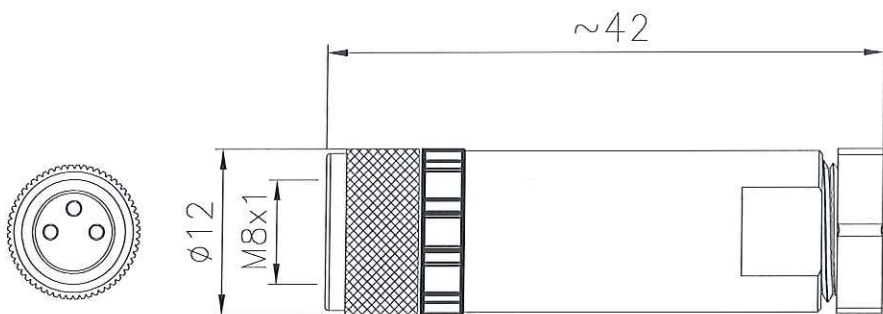

材料规格

4	防水O型圈	橡胶	/	Pcs	1
3	绝缘体材质	尼龙	/	Pcs	1
2	接触体材质	黄铜	镀金	Pcs	3~6
1	外壳材质	黄铜	镀镍	Pcs	1
No.	Specification	Material	Treat	Unit	Q'ty

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE			LINEAR	ANGLES	APPROVED	2/8/14	22.5.8	M08XXX-02-010	ENDE05		WanLian Technology Co., Ltd
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	高延	22.5.8	TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	黄延	22.5.8	M8 3~6P 组装式母插头			