
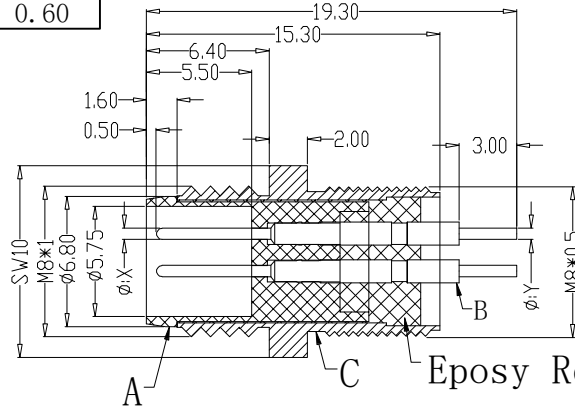



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


### PCB Layout Reference

RoHS







	2pin	3pin	4pin	5pin	6pin	8pin
图形						
CODE	A-code	A-code	A-code	B-code	A-code	A-code
X值	1.00	1.00	1.00	1.00	0.72	0.60
Y值	1.00	1.00	1.00	1.00	0.60	0.60

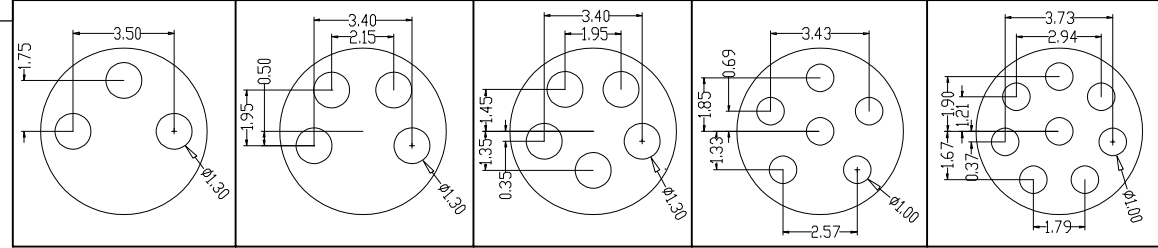

Eposy Resin



Recommended Panel Cut-out

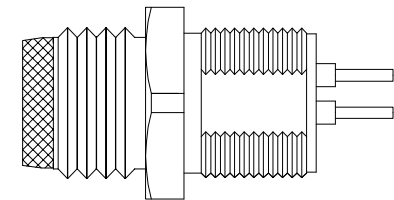

P/N	TITLE
M08A02-03-044	M8防水 A-CODE 2P 板端公头 后锁面板式M8 SW10T-13.7L
M08A03-03-044	M8防水 A-CODE 3P 板端公头 后锁面板式M8 SW10T-13.7L
M08A04-03-044	M8防水 A-CODE 4P 板端公头 后锁面板式M8 SW10T-13.7L
M08B05-03-044	M8防水 B-CODE 5P 板端公头 后锁面板式M8 SW10T-13.7L
M08A06-03-044	M8防水 A-CODE 6P 板端公头 后锁面板式M8 SW10T-13.7L
M08A08-03-044	M8防水 A-CODE 8P 板端公头 后锁面板式M8 SW10T-13.7L

Engagemn frice	≤ 50N	Rated volage	2-5pin:60v DC 6-8PIN:30V DC
Disengagement force	≥ 5N	Rated current	2-5pin:4A 6-8PIN:2A
Mechanical lifespan	≥ 500	Insulation resistance	≥ 1000MΩ
IP rating	IP67/IP68	Conract resistangce	≤ 10MΩ
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C

	PARTS	MARERIALS	TREATMENT	AMOUNT
A	HOUSING	PA66+GF	SPECIFY COLOR	1
B	CONTACT	BRASS	GOLD PLATED	2~8
C	OUTER CONTACT	BRASS	NICKL PLATED	1
D	O-RING	EPDM	BLACK	1
E	NUT	BRASS	NICKL PLATED	1

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO: M08XXX-03-044	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1					
				0.0±0.35	X'REF±6'	APPROVED					
				UNIT:mm	0.00±0.25	X'±3'					
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	TITLE: M8防水 2~8P板端公头 后锁面板式M8 SW10T-13.7L			REV: A0	SHEET: 1/1