
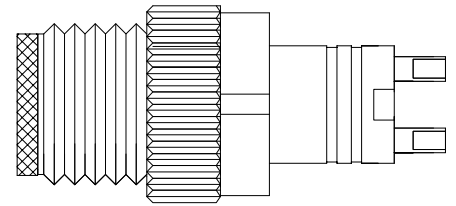


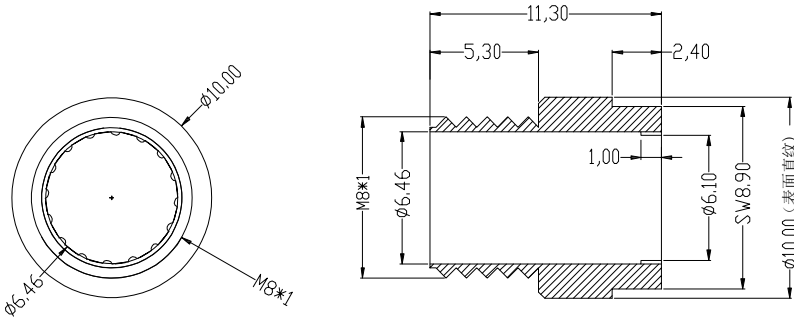

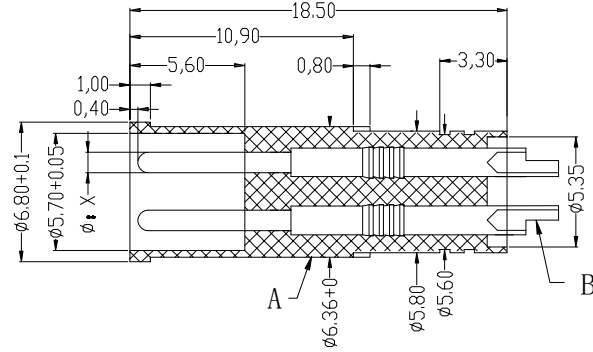
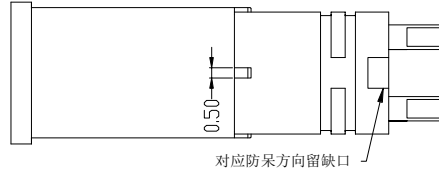


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

	2pin	3pin	4pin	5pin	6pin	8pin
图形						
CODE	A-code	A-code	A-code	B-code	A-code	A-code
x值	1.00	1.00	1.00	1.00	0.72	0.60



组合图

P/N	TITLE	Engagemnr firce	Rated volage	2-5pin:60v DC 6-8PIN:30V DC	PARTS	MARERIALS	TREATMENT	AMOUNT
M08A02-07-009	M8防水 A-CODE 2P 线端公头C款+11.3L防振动六角螺丝	≤40N			A	HOUSING	PA66+GF	SPECIFY COLOR 1
M08A03-07-009	M8防水 A-CODE 3P 线端公头C款+11.3L防振动六角螺丝	≥5N			B	CONTACT	BRASS	GOLD PLATED 2~8
M08A04-07-009	M8防水 A-CODE 4P 线端公头C款+11.3L防振动六角螺丝	≥500			C	NUT	BRASS	NICKL PLATED 1
M08B05-07-009	M8防水 B-CODE 5P 线端公头C款+11.3L防振动六角螺丝							
M08A06-07-009	M8防水 A-CODE 6P 线端公头C款+11.3L防振动六角螺丝							
M08A08-07-009	M8防水 A-CODE 8P 线端公头C款+11.3L防振动六角螺丝							
		Disengagement force	Rated current	2-5pin:4A 6-8PIN:2A				
		Mechanical lifespan	Insulation resirance	≥1000MΩ				
		IP rating	Conract resistangce	≤10MΩ				
		Flammability	Operation Temperature	-40° C~105° C				

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M08XXX-07-009	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES						
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER					
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN					