
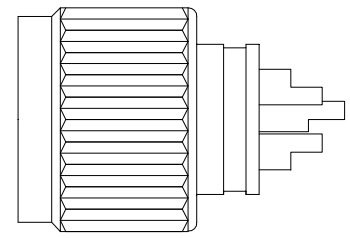


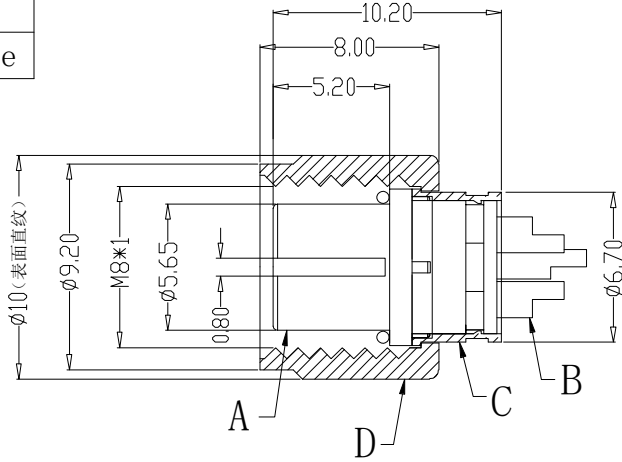


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

	2pin	3pin	4pin	5pin	6pin	8pin
图形						
CODE	A-code	A-code	A-code	B-code	A-code	A-code



组合图

P/N	TITLE	Engagemnr firce	Rated voltage	2-5pin:60v DC 6-8PIN:30V DC	A	PARTS	MARERIALS	TREATMENT	AMOUNT
M08A02-08-011	M8防水 A-CODE 2P 线端母头 屏蔽款+8L直纹螺母	≤40N	Rated voltage			HOUSING	PA66+GF	SPECIFY COLOR	1
M08A03-08-011	M8防水 A-CODE 3P 线端母头 屏蔽款+8L直纹螺母	≥5N	Rated current	2-5pin:4A 6-8PIN:2A		CONTACT	BRASS	GOLD PLATED	2~8
M08A04-08-011	M8防水 A-CODE 4P 线端母头 屏蔽款+8L直纹螺母	≥500	Insulation resirance	≥1000MΩ		SHIELD	BRASS	NICKL PLATED	1
M08B05-08-011	M8防水 B-CODE 5P 线端母头 屏蔽款+8L直纹螺母		Conract resistangce	≤10MΩ		NUT	BRASS	NICKL PLATED	1
M08A06-08-011	M8防水 A-CODE 6P 线端母头 屏蔽款+8L直纹螺母		Flammability	UL94 V-0		O-RING	EPDM	BLACK	1
M08A08-08-011	M8防水 A-CODE 8P 线端母头 屏蔽款+8L直纹螺母		Operation Temperature	-40° C~105° C					

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE		LINEAR	ANGLES	1:1			M08XXX-08-011	ENDE05	
			0.0±0.35	X'REF±6'	APPROVED					
			0.00±0.25	X'±3'	DESIGNER			TITLE:		
			UNIT:mm	0.000±0.10	X'X' ±2'	DRAWN		M8防水 2~8P线端母头 屏蔽款+8L直纹螺母	REV: A0	SHEET: 1/1