


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

| | | | | | | | | | | | | | | | | | | |
|----|------|------|-------------|------|------|-------------|-------------|------|------|----------------|--------------|------------------|--------------|--------------|--------------|-------------|------|------|
| 图形 | | | | | | | | | | | | | | | | | | |
| 规格 | 2PIN | 2PIN | 2PIN 4改2 | 3PIN | 3PIN | 3PIN 4改3 | 4PIN 2+2 | 4PIN | 5PIN | 5PIN 正方形2+3 | 5PIN 180° | 5PIN 260° 2+3 | 5PIN 360° | 6PIN 360° | 6PIN 258° | 6PIN 8改6 | 7PIN | 8PIN |
| X值 | 1.20 | 1.50 | 1.00 | 1.20 | 1.50 | 1.00 | 1.20+1.00 | 1.00 | 1.00 | 1.50+1.00 | 0.80 | 1.50+1.00 | 1.00 | 1.00 | 0.80 | 0.80 | 0.80 | 0.80 |

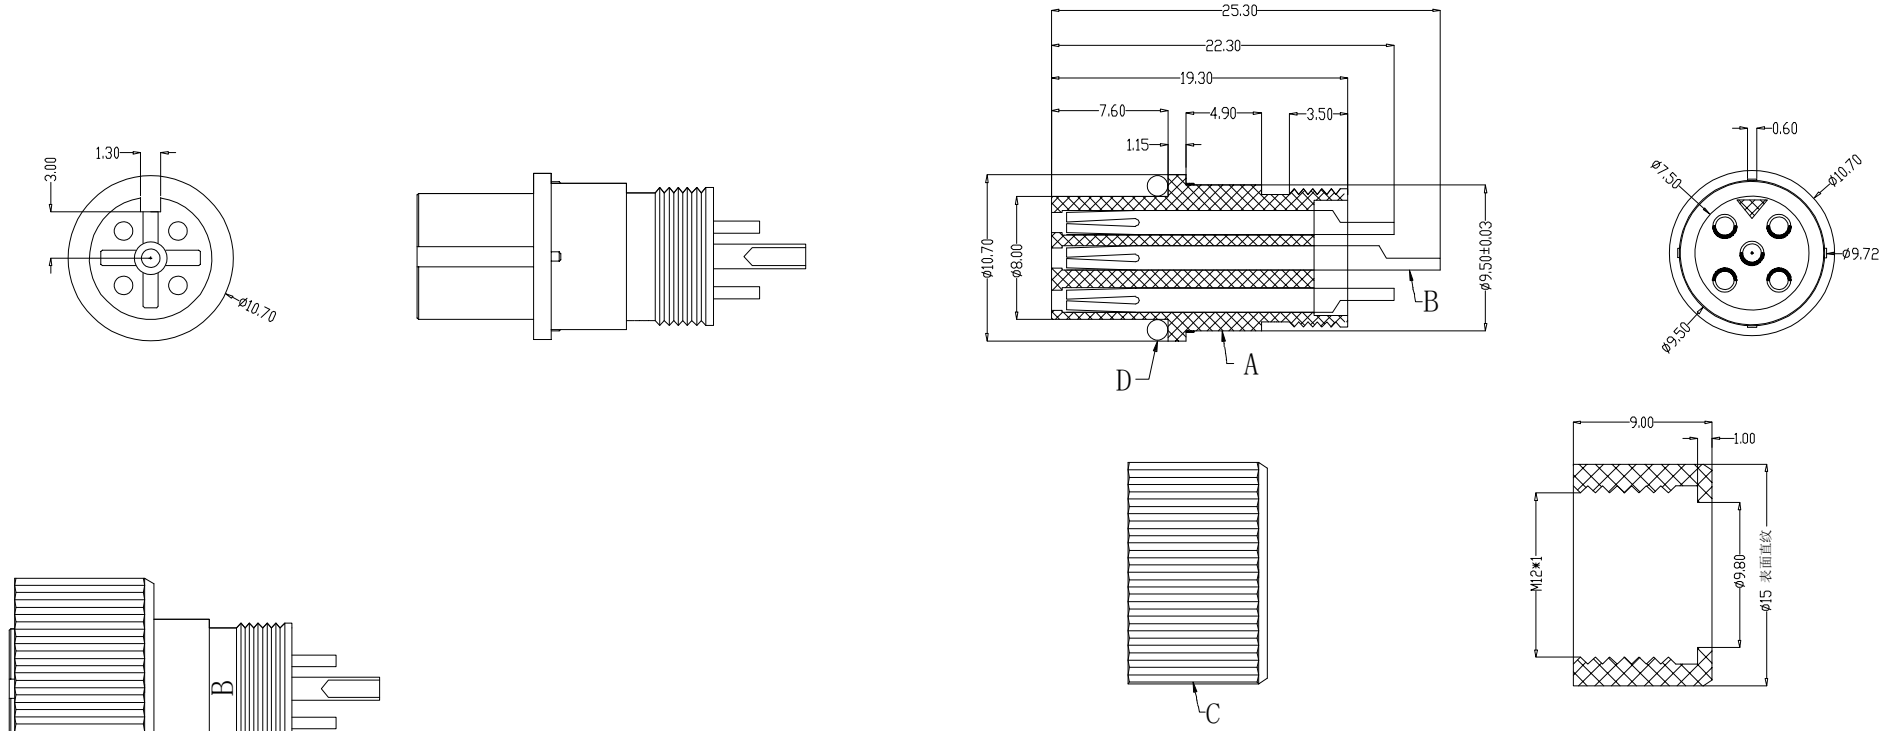

组合图

| | | | | | | | | |
|---------------------|-----------|-----------------------|--------------------------|-------|-----------|-----------|---------------|---|
| Engagemnr firce | ≤50N | Rated volage | 2-5pin:60v 6-8pin:30v | PARTS | MARERIALS | TREATMENT | AMOUNT | |
| Disengagement force | ≥5N | Rated current | 2-5pin:4A 6-8pin:2A | | | | | |
| Mechanical lifespan | ≥500 | Insulation resirance | ≥1000MΩ | A | HOUSING | PA66+GF | SPECIFY COLOR | 1 |
| IP rating | IP67/IP68 | Conract resistangce | ≤10MΩ | B | CONTACT | BRASS | GOLD PLATED | 5 |
| Flammability | UL94 V-0 | Operation Temperature | -40° C~105° C | C | NUT | ALALLOY | BLACK/SILVER | 1 |
| | | | | D | O-RING | EPDM | BLACK | 1 |
| | | | | E | | | | |

| P/N | TITLE |
|---------------|--|
| M12A05-08-078 | M12防水 A-CODE 5P线端母头 B款9.0L铝螺母180度 0.80*5 |

| | | | | | | | | | | | | |
|------|-----------------|------|----------|--------------------|----------|----------|------|---------------|----------|--|---------------------------------|------------|
| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE: | NAME | DATE | PART.NO: | DWG.NO: | WanLian Technology Co., Ltd | |
| A0 | NEW RELEASE | | | LINEAR | ANGLES | 1:1 | | | | | | |
| | | | 0.0±0.35 | X'REF±6° | APPROVED | | | M12A05-08-078 | ENDE05 | | | |
| | | | UNIT:mm | 0.00±0.25 | X'±3° | DESIGNER | | | | | | |
| | | | SIZE: A4 | 0.000±0.10 | X'X' ±2° | DRAWN | | | | TITLE: | | |
| | | | | | | | | | | M12防水 A-CODE 5P线端母头 B款9.0L铝螺母180度 0.80*5 | REV: A0 | SHEET: 1/1 |