


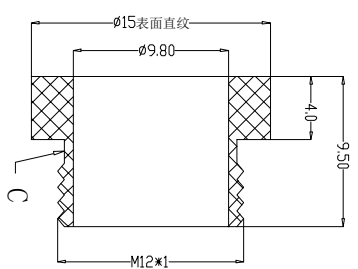
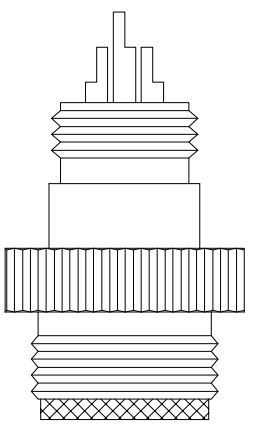

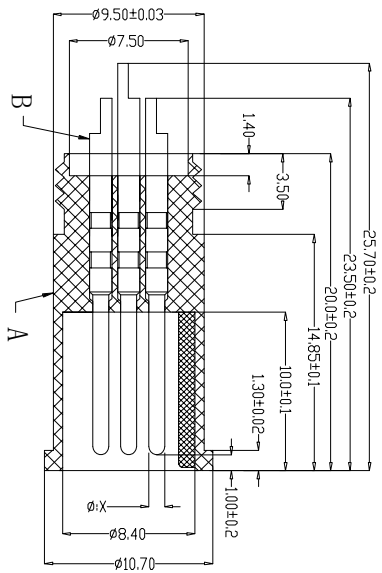


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

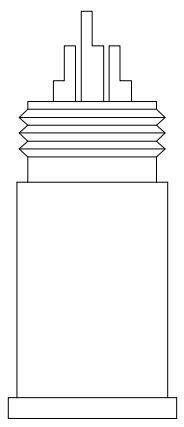

图形	规格	X值	1.20	1.50	1.00	1.20	1.50	1.00	1.20+1.00	1.00	1.00	1.00	1.50+1.00	0.80	1.50+1.00	1.00	1.00	1.00	0.80	0.80	0.80	0.80	0.80																											
	2PIN	1.20		2PIN	1.50		2PIN 4芯2	1.00		3PIN	1.20		3PIN 4芯3	1.00		4PIN 2+2	1.00		4PIN	1.00		5PIN	1.00		5PIN 正方形2+3	1.50+1.00		5PIN 180°	0.80		5PIN 260° 2+3	1.50+1.00		5PIN 360°	1.00		6PIN 360°	1.00		6PIN 258°	0.80		6PIN 8芯6	0.80		7PIN	0.80		8PIN	0.80



组合图

P/N	TITLE		Engagement force	≤50N	Rated voltage	2-5pin:60V 6-8pin:30V	PARTS	MATERIALS	TREATMENT	AMOUNT
M12A06-07-090	M12防水 A-CODE 6P线端公头 B款9.5L铝螺丝 8改6 0.8*6		Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A	A	PA66+GF	SPECIFY COLOR	1
			Mechanical lifespan	≥500	Insulation resistance	≥1000MΩ	B	BRASS	GOLD PLATED	6
			IP rating	IP67/IP68	Contract resistance	≤10MΩ	C	NUT	BLACK/SILVER	1
			Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	D			
							E			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES SCALE: 1:1		NAME	DATE	PART.NO:	DWG.NO:	Wanlian Technology Co., Ltd	
AO	NEW RELEASE		LINEAR	ANGLES	APPROVED		M12A06-07-090	ENDE05	REV: AO	SHEET: 1/1
			0.0±0.35	X°REF±6°	DESIGNER					
			UNIT:mm	X'±.3'	DRAWN		TITLE:			
			SIZE: A4	0.000±0.10			M12防水 A-CODE 6P线端公头 B款9.5L铝螺丝 8改6 0.8*6			